

TABLA


Certificate model name: TABLA



AIR - Pellet stoves



Nominal power	kW	7
Reduced power	kW	2,7
Introduced thermal power (max)	kW	7,8
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Seasonal energy efficiency	ηs [%]	85
Nominal efficiency	%	89,5
Reduced efficiency	%	93
Heating volume (min-max)	m³	77 - 200
Nominal CO at 13% O ₂	%	0,0103
Reduced CO at 13% O ₂	%	0,0146
Emissions CO (13% O ₂) (min-max)	mg/Nm³	183 - 129
Emissions OGC (13% O ₂) (min-max)	mg/Nm³	7,0 - 4,0
Emissions NOX (13% O ₂) (min-max)	mg/Nm³	103 - 116
Dust content at 13% O ₂ (min- max)	mg/Nm³	19 - 14
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	12
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,61 - 1,7
Autonomy (min-max)	h	7,1 - 19,7
Ignition electrical absorption (max)	W	345
Operating electrical absorption (max)	W	72
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	11
Mass of smoke (min-max)	g/sec	3,0 - 4,9
Exhaust fumes temperature (max)	°C	182
Net weight	kg	60
Gross weight	kg	70
Exhaust fumes (A)	Ø mm	80
Hole combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	-
Ducting capability up to	m	-

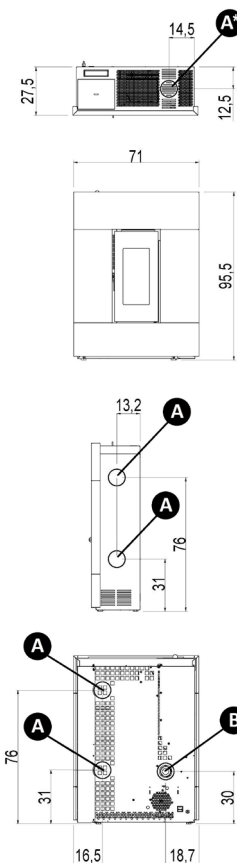

BlmSchV 2015
Regensburg
München
Stuttgart
Aachen



MATCH

7019032	White steel	EAN 8053859011057
7019031	Red steel	EAN 8053859011040
7019033	Anthracite steel	EAN 8053859011064

PLUS



Sealed chamber



Cast iron burning pot



Upper, back and lateral exhaust



Easy start



Connection to the room thermostat



Wi-Fi kit (optional)



Remote control (optional) **




Daily weekly programming



** Operation requires 1 CR 2025 Lithium battery.
Used batteries contain metals which are harmful for the environment; they must therefore be disposed of separately in the special containers.


STOVE PACKING



L (cm)	H (cm)	P (cm)
79	110,5	60


VOLUME (m³)
0,52

LINING PACKING




L (cm)	H (cm)	P (cm)

STOCKING



Nr (max)
2

TRANSPORT



66 pcs