




Nominal power	kW	7
Reduced power	kW	2,7
Introduced thermal power (max)	kW	7,82
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	89,5
Reduced efficiency	%	93
Heating volume (min-max)	m <sup>3</sup>	65 - 168
Nominal CO at 13% O <sub>2</sub>	%	0,0103
Reduced CO at 13% O <sub>2</sub>	%	0,0146
Emissions CO (13% O <sub>2</sub> ) (min-max)	mg/Nm <sup>3</sup>	183 - 129
Emissions OGC (13% O <sub>2</sub> ) (min-max)	mg/Nm <sup>3</sup>	7,0 - 4,0
Emissions NOX (13% O <sub>2</sub> ) (min-max)	mg/Nm <sup>3</sup>	103 - 116
Dust content at 13% O <sub>2</sub> (min-max)	mg/Nm <sup>3</sup>	19 - 14
Boiler capacity (H <sub>2</sub> O)	l	-
Hopper capacity	kg	12
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,61 - 1,7
Autonomy (min-max)	h	7,1 - 19,7
Ignition electrical absorption (max)	W	345
Operating electrical absorption (max)	W	72
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	11
Exhaust diameter	mm	80
Combustion air inlet diameter	mm	60
Mass of smoke (min-max)	g/sec	3,0 - 4,9
Exhaust fumes temperature (max)	°C	182
Net weight	kg	63
Gross weight	kg	76
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	-
Ducting capability up to	m	-

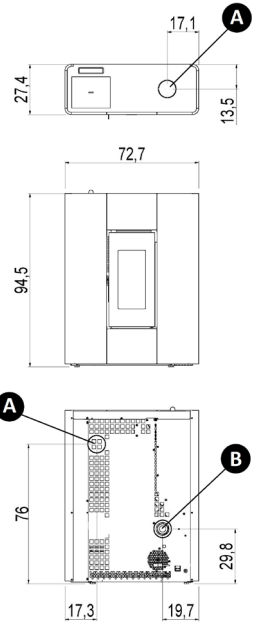

### MATCH

7019064		White steel	EAN 8053859011545
7019063		Bordeaux steel	EAN 8053859011538
7019065		Anthracite steel	EAN 8053859011552

### PLUS



Sealed chamber



Easy start



Remote control \*\*



Cast iron burning pot



Connection to the room thermostat




Daily weekly programming



Upper and back exhaust

\*\* Operation requires 1 CR 2025 Lithium battery.  
Used batteries contain metals which are harmful for the environment; they must therefore be disposed of separately in the special containers.


### STOVE PACKING



L (cm)	H (cm)	P (cm)
107	44,8	80

VOLUME (m <sup>3</sup> )
0,38

### LINING PACKING




	L (cm)	H (cm)	P (cm)

### STOCKING

MAX. 5	
4	
3	
2	
1	
	Nr (max) 5

### TRANSPORT



180 pcs