


ROXY STAND

AIR - Pellet stoves

FreePoint



Nominal power	kW	7
Reduced power	kW	2,7
Introduced thermal power (max)	kW	7,82
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	89,5
Reduced efficiency	%	93
Heating volume (min-max)	m ³	65 - 168
Nominal CO at 13% O ₂	%	0,0103
Reduced CO at 13% O ₂	%	0,0146
Emissions CO (13% O ₂) (min-max)	mg/Nm ³	183 - 129
Emissions OGC (13% O ₂) (min-max)	mg/Nm ³	7,0 - 4,0
Emissions NOX (13% O ₂) (min-max)	mg/Nm ³	103 - 116
Dust content at 13% O ₂ (min-max)	mg/Nm ³	19 - 14
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	12
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,61 - 1,7
Autonomy (min-max)	h	7,1 - 19,7
Ignition electrical absorption (max)	W	345
Operating electrical absorption (max)	W	72
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	11
Exhaust diameter	mm	80
Combustion air inlet diameter	mm	60
Mass of smoke (min-max)	g/sec	3,0 - 4,9
Exhaust fumes temperature (max)	°C	182
Net weight	kg	66
Gross weight	kg	79
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	-
Ducting capability up to	m	-

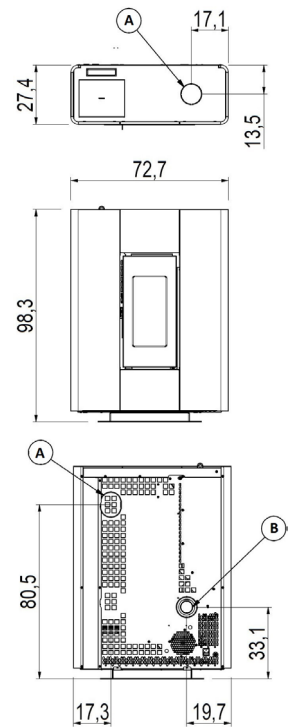

BImSchV 2015
Regensburg
München
Stuttgart
Aachen
EN 14785:2006



MATCH

7020002		White steel	EAN 8053859011934
7020001		Bordeaux steel	EAN 8053859011927
7020003		Anthracite steel	EAN 8053859011941

PLUS



Sealed chamber



Easy start



Remote control **



Cast iron burning pot



Connection to the room thermostat




Daily weekly programming



Upper and back exhaust

** Operation requires 1 CR 2025 Lithium battery.
Used batteries contain metals which are harmful for the environment; they must therefore be disposed of separately in the special containers.


STOVE PACKING



L (cm)	H (cm)	P (cm)
107	44,8	80

VOLUME (m ³)
0,38

LINING PACKING




	L (cm)	H (cm)	P (cm)

STOCKING

MAX. 5	
4	
3	
2	
1	
	Nr (max) 5

TRANSPORT



180 pcs