

MAYA IDRO 24


PELLET IDRO - Water-heating pellet stoves

CADEL

Certificate model name : MAYA IDRO 24 T2




Nominal power	kW	22.4
Reduced power	kW	4.9
Introduced thermal power (max)	kW	24.3
Nominal water useful power	kW	18
Reduced water useful power	kW	3.4
Seasonal energy efficiency	ηs [%]	89
Nominal efficiency	%	92
Reduced efficiency	%	96.7
Heating volume (min-max)	m³	137 - 627
Nominal CO at 13% O ₂	%	0.010
Reduced CO at 13% O ₂	%	0.012
Emissions CO (13% O ₂) (min-max)	mg/Nm³	150 - 136
Emissions OGC (13% O ₂) (min-max)	mg/Nm³	3 - 2
Emissions NOX (13% O ₂) (min-max)	mg/Nm³	94 - 99
Dust content at 13% O ₂ (min-max)	mg/Nm³	18 - 14
Boiler capacity (H ₂ O)	l	14
Hopper capacity	kg	22
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	1 - 5.1
Autonomy (min-max)	h	4 - 22
Ignition electrical absorption (max)	W	343
Operating electrical absorption (max)	W	117
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	12
Mass of smoke (min-max)	g/sec	4.5 - 12.1
Exhaust fumes temperature (max)	°C	153
Net weight	kg	167
Gross weight	kg	173,5
Exhaust fumes (A)	Ø mm	80
Hole combustion air inlet (B)	Ø mm	50
Ducting outlet (C)	Ø mm	-
Ducting capability up to	m	-

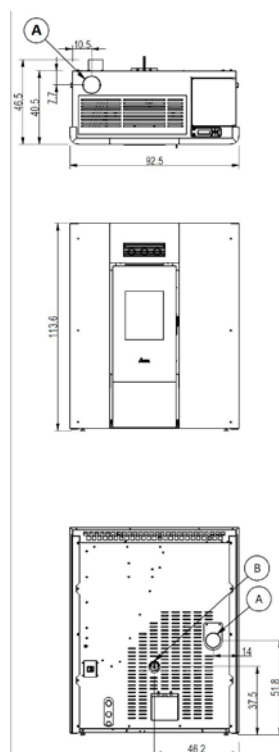


MATCH

7022292		Anthracite steel	EAN 8053859018391
7022288		White steel	EAN 8053859018353
7022289		Light bronze steel	EAN 8053859018360
7022291		Red steel	EAN 8053859018384
7022290		Titanium steel	EAN 8053859018377

PLUS

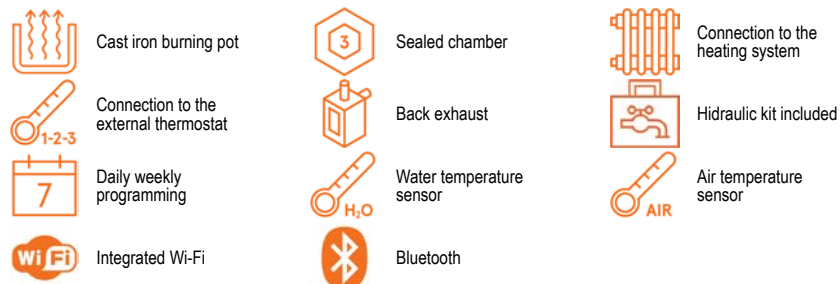


STOVE PACKING



L (cm)	H (cm)	P (cm)
79	130,5	102,2


VOLUME (m³)
1,05

LINING PACKING




	L (cm)	H (cm)	P (cm)

STOCKING



Nr (max)
1

TRANSPORT



39 pcs