

ZEFIRO 9


PELLET AIR - Pellet stoves



Certificate model name : ZEFIRO3 9kW



Nominal power	kW	9,3
Reduced power	kW	2,7
Introduced thermal power (max)	kW	10,5
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Seasonal energy efficiency	ηs [%]	84
Nominal efficiency	%	88,4
Reduced efficiency	%	94,2
Heating volume (min-max)	m³	77 - 265
Nominal CO at 13% O ₂	%	0,012
Reduced CO at 13% O ₂	%	0,024
Emissions CO (13% O ₂) (min-max)	mg/Nm³	294 - 148
Emissions OGC (13% O ₂) (min-max)	mg/Nm³	3,3 - 2,6
Emissions NOX (13% O ₂) (min-max)	mg/Nm³	108 - 127
Dust content at 13% O ₂ (min-max)	mg/Nm³	19,2 - 19
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	15
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,59 - 2,17
Autonomy (min-max)	h	6,9 - 25
Ignition electrical absorption (max)	W	346
Operating electrical absorption (max)	W	113,7
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	11,9
Mass of smoke (min-max)	g/sec	2,6 - 5,7
Exhaust fumes temperature (max)	°C	197
Net weight	kg	94
Gross weight	kg	103
Exhaust fumes (A)	Ø mm	80
Hole combustion air inlet (B)	Ø mm	50
Ducting outlet (C)	Ø mm	80
Ducting capability up to	m	6

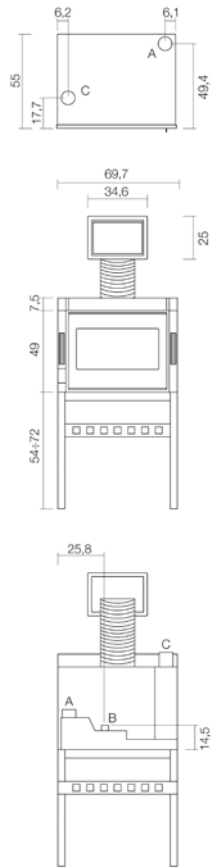

MATCH

7018023 Black steel EAN 8053859010050


OPTIONAL :

5020015	Optional	Kit podium	EAN 8053859012832
5018001	Optional	Pellet drawer	EAN 8053859010258
5018002	Optional	Loading pellet door	EAN 8053859010265
5018006	Optional	Frame	EAN 8053859010302
5018007	Optional	Frame drawer	EAN 8053859010319
5018005	Optional	Ducting Kit	EAN 8053859010296

PLUS

	Cast iron burning pot		Sealed chamber		Ducting Kit (optional)
	Aluminum auger		Connection to the external thermostat		Comfort mode
	Upper exhaust		Cast iron inner		Concentric flue kit (optional)
	Daily weekly programming		Bluetooth		Integrated Wi-Fi


STOVE PACKING



L (cm)	H (cm)	P (cm)
79	71.5	70


VOLUME (m³)
0.40

LINING PACKING



L (cm)	H (cm)	P (cm)
-	-	-

STOCKING



TRANSPORT

