

SPARK 11


AIR PLUS - Ducted pellet stoves



Certificate model name : SPARK 11 T1



Nominal power	kW	10,5
Reduced power	kW	3
Introduced thermal power (max)	kW	12
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Seasonal energy efficiency	ηs [%]	84
Nominal efficiency	%	88
Reduced efficiency	%	90
Heating volume (min-max)	m³	84 - 294
Nominal CO at 13% O ₂	%	0,013
Reduced CO at 13% O ₂	%	0,018
Emissions CO (13% O ₂) (min-max)	mg/Nm³	230 - 159
Emissions OGC (13% O ₂) (min-max)	mg/Nm³	5 - 5
Emissions NOX (13% O ₂) (min-max)	mg/Nm³	130 - 100
Dust content at 13% O ₂ (min-max)	mg/Nm³	20 - 15
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	25
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,7 - 2,5
Autonomy (min-max)	h	29 - 8
Ignition electrical absorption (max)	W	340
Operating electrical absorption (max)	W	120
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	12
Mass of smoke (min-max)	g/sec	4 - 8
Exhaust fumes temperature (max)	°C	200
Net weight	kg	108
Gross weight	kg	118
Exhaust fumes (A)	Ø mm	80
Hole combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	80
Ducting capability up to	m	6

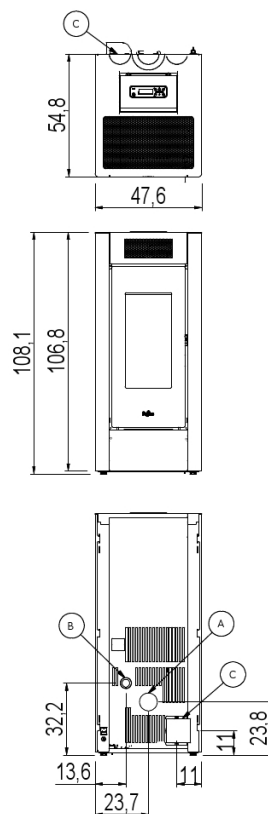

Art. 15A-B-VG 2015
BImSchV 2015
Regensburg
München
Stuttgart
Aachen



MATCH

7022005	White steel	EAN 8053859014737
7022006	Red steel	EAN 8053859014744
7022007	Anthracite steel	EAN 8053859014751

PLUS



AIRTIGHT Sealed chamber



Remote control ** (optional)



Silent function



Ductible with 1 independent motor



Wi-Fi kit (optional)



Back exhaust



Connection to the room thermostat



Easy start




Cast iron burning pot



Daily weekly programming


STOVE PACKING



L (cm)	H (cm)	P (cm)
79	125	65

VOLUME (m³)
0,65

LINING PACKING




L (cm)	H (cm)	P (cm)

STOCKING



Nr (max)
2

TRANSPORT



60 pcs