

ELANE 9


AIR - Pellet stoves



Certificate model name : ELANE 9 T1



Nominal power	kW	8,5
Reduced power	kW	2,5
Introduced thermal power (max)	kW	9,5
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Seasonal energy efficiency	ηs [%]	85
Nominal efficiency	%	89
Reduced efficiency	%	90
Heating volume (min-max)	m³	70 - 238
Nominal CO at 13% O ₂	%	0,013
Reduced CO at 13% O ₂	%	0,024
Emissions CO (13% O ₂) (min-max)	mg/Nm³	297 - 160
Emissions OGC (13% O ₂) (min-max)	mg/Nm³	5 - 3
Emissions NOX (13% O ₂) (min-max)	mg/Nm³	120 - 130
Dust content at 13% O ₂ (min-max)	mg/Nm³	20 - 15
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	17
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,6 - 2,0
Autonomy (min-max)	h	8 - 28
Ignition electrical absorption (max)	W	340
Operating electrical absorption (max)	W	96
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	12
Mass of smoke (min-max)	g/sec	3,1 - 6,0
Exhaust fumes temperature (max)	°C	175
Net weight	kg	65
Gross weight	kg	75
Exhaust fumes (A)	Ø mm	80
Hole combustion air inlet (B)	Ø mm	50
Ducting outlet (C)	Ø mm	-
Ducting capability up to	m	-

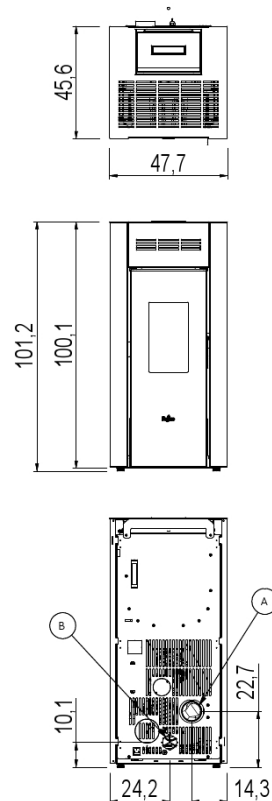

Art. 15A-B-VG 2015
BImSchV 2015
Regensburg
München
Stuttgart
Aachen



MATCH

7022001	White steel	EAN 8053859014706
7022002	Bordeaux steel	EAN 8053859014713
7022003	Anthracite steel	EAN 8053859014720

PLUS



Sealed chamber



Cast iron burning pot



Back exhaust



Easy start



Connection to the room thermostat



Wi-Fi kit (optional)



Remote control (optional) **




Daily weekly programming



Function "Silent"


STOVE PACKING



L (cm)	H (cm)	P (cm)
79	114,3	60


VOLUME (m³)
0,55

LINING PACKING



L (cm)	H (cm)	P (cm)

STOCKING



TRANSPORT

