


VEGA AIRTIGHT

AIR PLUS - Ducted pellet stoves



Nominal power	kW	11
Reduced power	kW	3,3
Introduced thermal power (max)	kW	12,3
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	89
Reduced efficiency	%	93,5
Heating volume (min-max)	m ³	79 - 264
Nominal CO at 13% O ₂	%	0,002
Reduced CO at 13% O ₂	%	0,022
Emissions CO (13% O ₂) (min-max)	mg/Nm ³	268 - 23
Emissions OGC (13% O ₂) (min-max)	mg/Nm ³	7,0 - 2,0
Emissions NOX (13% O ₂) (min-max)	mg/Nm ³	105 - 121
Dust content at 13% O ₂ (min-max)	mg/Nm ³	11 - 14
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	22
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,73 - 2,6
Autonomy (min-max)	h	8,5 - 30
Ignition electrical absorption (max)	W	360
Operating electrical absorption (max)	W	77
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	12
Exhaust diameter	mm	80
Combustion air inlet diameter	mm	60
Mass of smoke (min-max)	g/sec	3,7 - 7,6
Exhaust fumes temperature (max)	°C	197
Net weight	kg	104
Gross weight	kg	116,8
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	C
Ducting capability up to	m	6

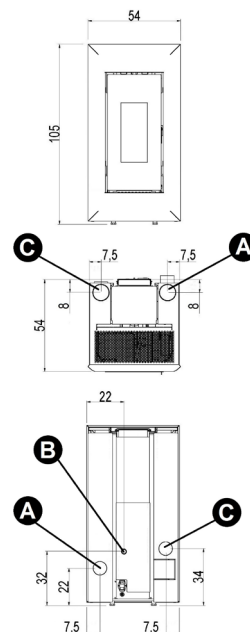

MATCH


7019051	NEUTRAL STRUCTURE	EAN 8053859011415
6913092	White steel	EAN 8033123614115
6913091	Bordeaux steel	EAN 8033123614108
6915007	Moka steel	EAN 8033123616072
6913093	Anthracite steel	EAN 8033123614122

PLUS

	AIRTIGHT sealed chamber		Wi-Fi kit (optional)		Easy start
	Remote control **		Ductible with 1 independent motor		Cold hand
	Cast iron burning pot		Silent function		Connection to the room thermostat
	Daily weekly programming		Upper and back exhaust		

** Operation requires 1 CR 2025 Lithium battery.
Used batteries contain metals which are harmful for the environment; they must therefore be disposed of separately in the special containers.


STOVE PACKING



L (cm)	H (cm)	P (cm)
80	124,5	70


VOLUME (m ³)
0,70

LINING PACKING



	L (cm)	H (cm)	P (cm)
steel	57	11,5	104,7

STOCKING



TRANSPORT

