

ZEN AIRTIGHT


INSERT - Pellet insert

FreePoint

Certificate model name : ZEN AIRTIGHT



Nominal power	kW	9,3
Reduced power	kW	2,7
Introduced thermal power (max)	kW	10,46
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	88,4
Reduced efficiency	%	94,2
Heating volume (min-max)	m ³	65 - 223
Nominal CO at 13% O ₂	%	0,012
Reduced CO at 13% O ₂	%	0,024
Emissions CO (13% O ₂) (min-max)	mg/Nm ³	294 - 148
Emissions OGC (13% O ₂) (min-max)	mg/Nm ³	3,3 - 2,6
Emissions NOX (13% O ₂) (min-max)	mg/Nm ³	108 - 127
Dust content at 13% O ₂ (min-max)	mg/Nm ³	19,2 - 19
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	15
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,59 - 2,17
Autonomy (min-max)	h	6,9 - 25
Ignition electrical absorption (max)	W	346
Operating electrical absorption (max)	W	113,7
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	11,9
Exhaust diameter	mm	80
Combustion air inlet diameter	mm	60
Mass of smoke (min-max)	g/sec	2,6 - 5,7
Exhaust fumes temperature (max)	°C	197
Net weight	kg	94
Gross weight	kg	106
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	-
Ducting capability up to	m	-

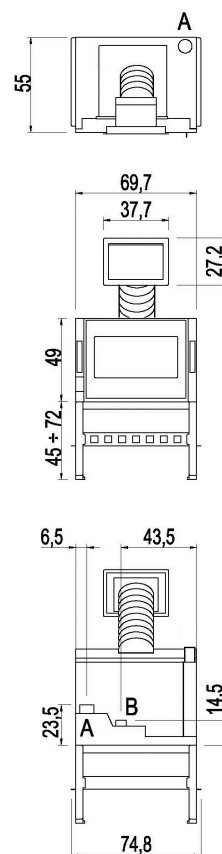

BImSchV 2015
Regensburg
München
Stuttgart
Aachen
EN 14785:2006



MATCH

7019008



Black steel

EAN 8053859010654

PLUS



AIRTIGHT Sealed chamber



Cast iron inner



Connection to the room thermostat



Integrated Wi-Fi



Cast iron burning pot



Daily weekly programming



Easy start




Silent function



Upper exhaust


STOVE PACKING



L (cm)	H (cm)	P (cm)
80	66	70


VOLUME (m ³)
0,37

LINING PACKING



L (cm)	H (cm)	P (cm)

STOCKING



TRANSPORT

