

STEEL 9


AIR PLUS - Ducted pellet stoves

FreePoint

Certificate model name : STEEL 9 T1



Nominal power	kW	8,5
Reduced power	kW	2,5
Introduced thermal power (max)	kW	9,5
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Seasonal energy efficiency	ηs [%]	85
Nominal efficiency	%	87
Reduced efficiency	%	90
Heating volume (min-max)	m³	70 - 238
Nominal CO at 13% O ₂	%	0,013
Reduced CO at 13% O ₂	%	0,024
Emissions CO (13% O ₂) (min-max)	mg/Nm³	297 - 160
Emissions OGC (13% O ₂) (min-max)	mg/Nm³	5 - 3
Emissions NOX (13% O ₂) (min-max)	mg/Nm³	120 - 140
Dust content at 13% O ₂ (min-max)	mg/Nm³	20 - 15
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	17
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,6 - 2,1
Autonomy (min-max)	h	8 - 28
Ignition electrical absorption (max)	W	340
Operating electrical absorption (max)	W	106
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	10
Mass of smoke (min-max)	g/sec	3,1 - 6,0
Exhaust fumes temperature (max)	°C	211
Net weight	kg	92
Gross weight	kg	102
Exhaust fumes (A)	Ø mm	80
Hole combustion air inlet (B)	Ø mm	50
Ducting outlet (C)	Ø mm	80
Ducting capability up to	m	6

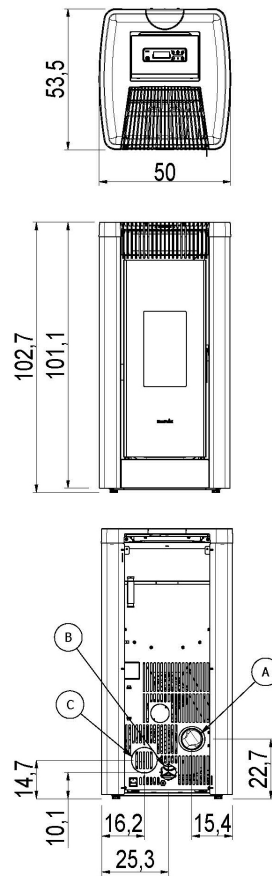

Art. 15A-B-VG 2015
BImSchV 2015
Regensburg
München
Stuttgart
Aachen



MATCH

7022030		White steel	EAN 8053859014980
7022036		Light bronze steel	EAN 8053859015048
7022031		Titanium steel	EAN 8053859014997
7022064		Anthracite steel	EAN 8053859015505

PLUS



AIRTIGHT sealed chamber



Integrated Wi-Fi



Easy start



Connection to the room thermostat



Back exhaust



Cast iron burning pot



Silent function



Daily weekly programming




Ductible with 1 independent motor



DUO-SHIELD combustion chamber


STOVE PACKING



L (cm)	H (cm)	P (cm)
79	120	60


VOLUME (m³)
0,57

LINING PACKING



L (cm)	H (cm)	P (cm)

STOCKING



Nr (max)
2

TRANSPORT

