

MITHOS PLUS 14 UP-TWIN


PELLET AIR PLUS - Pellet stoves



Certificate model name: MITHOS PLUS 14 UP-TWIN T2



Nominal power	kW	13.7
Reduced power	kW	3.7
Introduced thermal power (max)	kW	15.7
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Seasonal energy efficiency	ηs [%]	83
Nominal efficiency	%	88
Reduced efficiency	%	90
Heating volume (min-max)	m³	105 - 390
Nominal CO at 13% O ₂	%	0,010
Reduced CO at 13% O ₂	%	0,012
Emissions CO (13% O ₂) (min-max)	mg/Nm³	140 - 125
Emissions OGC (13% O ₂) (min-max)	mg/Nm³	10 - 2
Emissions NOX (13% O ₂) (min-max)	mg/Nm³	120 - 99
Dust content at 13% O ₂ (min - max)	mg/Nm³	17 - 15
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	23
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0.9 - 3.3
Autonomy (min-max)	h	7 - 26
Ignition electrical absorption (max)	W	360
Operating electrical absorption (max)	W	155
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	11
Mass of smoke (min-max)	g/sec	5.7 - 10
Exhaust fumes temperature (max)	°C	207
Net weight	kg	165 - 195
Gross weight	kg	181 - 211
Exhaust fumes (A)	Ø mm	80
Hole combustion air inlet (B)	Ø mm	130
Ducting outlet (C)	Ø mm	80
Ducting capability up to	m	8

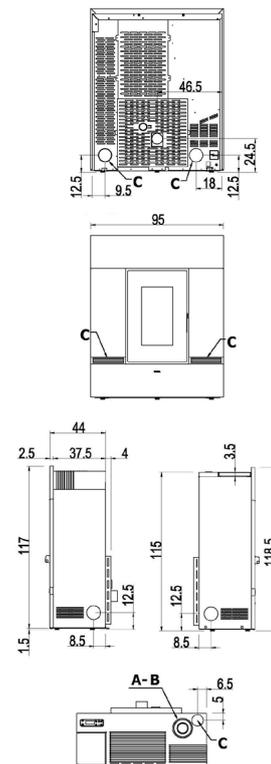


MATCH

7023102	White steel	EAN 8053859019749
7023103	Red steel	EAN 8053859019756
7023104	Anthracite steel	EAN 8053859019763
7023105	Light bronze steel	EAN 8053859019770
7023106	Titanium steel	EAN 8053859019787
7023107	Serpentino stone	EAN 8053859019794


OPTIONAL:

5020001	90° bend kit	EAN 8053859012474
---------	--------------	-------------------

PLUS

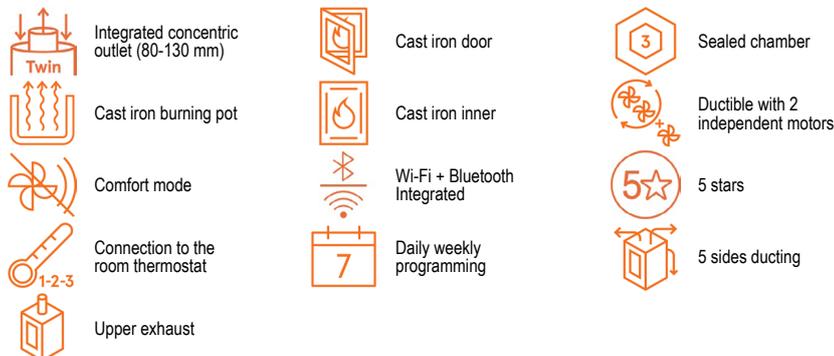


STOVE PACKING



L (cm)	H (cm)	P (cm)
79	130,5	102,2


VOLUME (m³)
1,05

LINING PACKING



	L (cm)	H (cm)	P (cm)
steel	59	12,5	109,2
stone (x2)	31	18	100

STOCKING



TRANSPORT

