

VERA 7 UP


Certificate model name : VERA 7.0 UP

AIR - Pellet stoves

Pegaso



Nominal power	kW	7
Reduced power	kW	2,5
Introduced thermal power (max)	kW	7,7
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Seasonal energy efficiency	ηs [%]	86
Nominal efficiency	%	90
Reduced efficiency	%	91
Heating volume (min-max)	m³	71 - 200
Nominal CO at 13% O ₂	%	0,0034
Reduced CO at 13% O ₂	%	0,019
Emissions CO (13% O ₂) (min-max)	mg/Nm³	238 - 42
Emissions OGC (13% O ₂) (min-max)	mg/Nm³	4 - 1
Emissions NOX (13% O ₂) (min-max)	mg/Nm³	140 - 117
Dust content at 13% O ₂ (min- max)	mg/Nm³	20 - 15
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	15
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,6 - 1,7
Autonomy (min-max)	h	8,8 - 25
Ignition electrical absorption (max)	W	345
Operating electrical absorption (max)	W	49
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	10
Mass of smoke (min-max)	g/sec	2,6 - 4,6
Exhaust fumes temperature (max)	°C	176
Net weight	kg	55
Gross weight	kg	66
Exhaust fumes (A)	Ø mm	80
Hole combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	-
Ducting capability up to	m	-

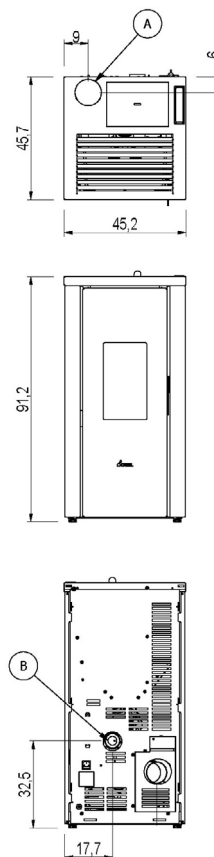

Art. 15A-B-VG 2015
BimSchV 2015
Regensburg
München
Stuttgart
Aachen
EN 14785:2006



MATCH

7022265	Red steel	EAN 8053859018063
7022264	Anthracite steel	EAN 8053859018056

PLUS



Sealed chamber



Connection to the room thermostat



Remote control ** (optional)



Easy start



Daily weekly programming



Wi - Fi optional



Cast iron burning pot




Up exhaust



Function "Silent"


STOVE PACKING



L (cm)	H (cm)	P (cm)
60	109	55

VOLUME (m³)
0.36

LINING PACKING



L (cm)	H (cm)	P (cm)

STOCKING



Nr (max)
2

TRANSPORT

