

MODO 9 STAND BI-FLUX


AIR - Pellet stoves

FreePoint

Certificate model name : MODO AIRTIGHT



Nominal power	kW	9,3
Reduced power	kW	2,7
Introduced thermal power (max)	kW	10,51
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Seasonal energy efficiency	ηs [%]	84
Nominal efficiency	%	89
Reduced efficiency	%	93,9
Heating volume (min-max)	m³	77 - 265
Nominal CO at 13% O ₂	%	0,009
Reduced CO at 13% O ₂	%	0,021
Emissions CO (13% O ₂) (min-max)	mg/Nm³	265 - 107
Emissions OGC (13% O ₂) (min-max)	mg/Nm³	3,2 - 2,1
Emissions NOX (13% O ₂) (min-max)	mg/Nm³	108 - 119
Dust content at 13% O ₂ (min- max)	mg/Nm³	18 - 19
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	11,5
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,59 - 2,18
Autonomy (min-max)	h	5,3 - 19
Ignition electrical absorption (max)	W	346
Operating electrical absorption (max)	W	113,7
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	11,8
Mass of smoke (min-max)	g/sec	2,8 - 5,7
Exhaust fumes temperature (max)	°C	190
Net weight	kg	108
Gross weight	kg	120
Exhaust fumes (A)	Ø mm	80
Hole combustion air inlet (B)	Ø mm	130
Ducting outlet (C)	Ø mm	-
Ducting capability up to	m	-

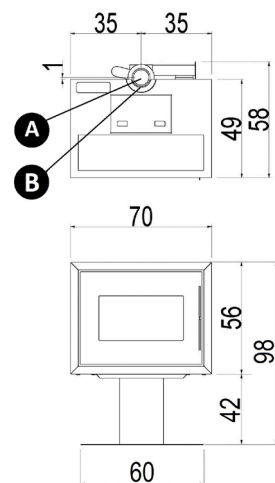

Art. 15A-B-VG 2015
BimSchV 2015
Regensburg
München
Stuttgart
Aachen



MATCH

7023024



Black steel

EAN 8053859019060

PLUS



AIRTIGHT sealed chamber



Cast iron inner



Connection to the room thermostat



Integrated Wi-Fi



Cast iron burning pot



Daily weekly programming



Easy start




Silent function



Upper exhaust


STOVE PACKING



L (cm)	H (cm)	P (cm)
79	117	71,5


VOLUME (m³)
0,66

ACCESSORIES



L (cm)	H (cm)	P (cm)

STOCKING



TRANSPORT

