


## Pellet Air Plus

### TECHNICAL DATA

Thermic Power (at min-at max)	kW	3,7 - 12,0
Introduced thermal power (at max)	kW	13,5
Water useful power (at min-at max)	kW	- -
Seasonal energy efficiency	ηs [%]	84
Useful efficiency (at min-at max)	%	90 - 89
Heatable volume (at min-at max)	m <sup>3</sup>	105 - 342
CO <sub>2</sub> (min-max)	%	5,0- 11,9
Emissions CO (13% O <sub>2</sub> ) (at min-at max)	mg/Nm <sup>3</sup>	140 - 125
Emissions OGC (13%O <sub>2</sub> ) (at min-at max)	mg/Nm <sup>3</sup>	10,0- 2,0
Emissions NOX (13% O <sub>2</sub> ) (at min-at max)	mg/Nm <sup>3</sup>	120 - 99
Dust content at 13% O <sub>2</sub> (at min-at max)	mg/Nm <sup>3</sup>	17 - 15
Fuel Pellet	mm	Ø6 L=3÷40
Hopper capacity	kg	23
Hourly consumption (at min-at max)	kg/h	0,8 - 2,8
Autonomy (at min-at max)	h	27 - 8
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	360
Operating electrical absorption (at max)	W	152
Chimney flue depression (at min-at max)	Pa	2 - 12
Mass of smoke (at min-at max)	g/sec	0,0 - 0,0
Exhaust fumes temperature (at min-at max)	°C	107 - 204
Distance from material comb. (back/side/under)	mm	200 / 300 / 0
Distance to material comb. (front/top)	mm	2000 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	80
Ductable up to	m	8
Appliance Type (tightness)	Type	CC50

### PLUS

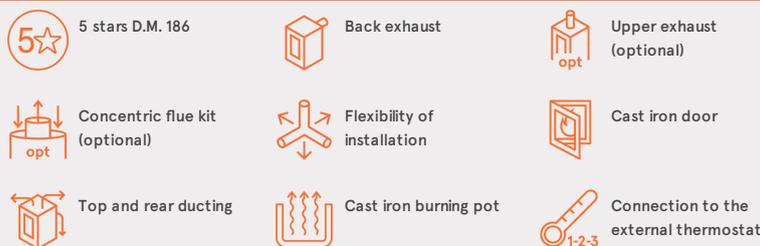

### AVAILABLE FINISHES

7023113		Steel White	EAN 8053859019855
7023115		Steel Titanium	EAN 8053859019879
7023116		Steel Red Bordeaux	EAN 8053859019886
7023117		Steel Anthracite	EAN 8053859019893

### CERTIFICATIONS

European standards  
Art. 15A B-VG 2015  
BlmSchV 2015  
Regensburg  
München  
Stuttgart  
Aachen




EN 16510-1:2022 / EN 16510-2-6:2022



### STOVE PACKAGE

	L (cm)	H (cm)	P (cm)
	80	130	68
	Volume (m <sup>3</sup> )	0,71	
	Gross weight (kg)	163	
	Net weight (kg)	152	

### STORAGE



### TRANSPORT

