


Certificate model name: BREEZE AIRTIGHT

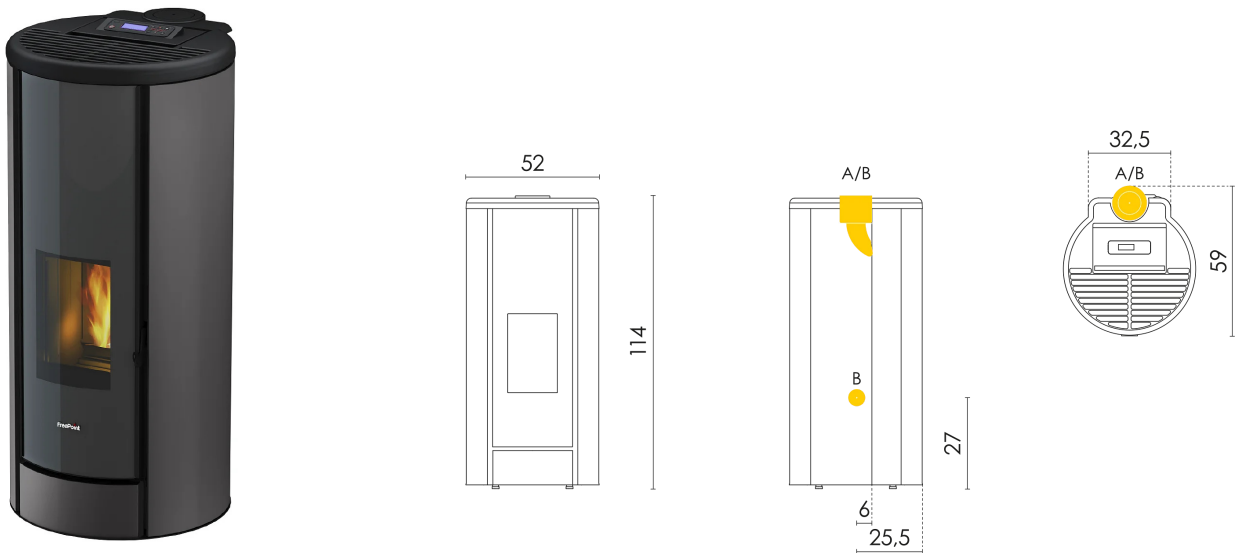

Pellet stoves Air

TECHNICAL DATA

Thermic Power (at min-at max)	kW	2,4 - 9,1
Introduced thermal power (at max)	kW	10,3
Water useful power (at min-at max)	kW	- -
Seasonal energy efficiency	ηs [%]	85
Useful efficiency (at min-at max)	%	93 - 89
Heatable volume (at min-at max)	m³	68 - 259
CO ₂ (min-max)	%	8,5- 13,9
Emissions CO (13% O ₂) (at min-at max)	mg/Nm³	274 - 63
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm³	3.9- 2.1
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm³	104 - 139
Dust content at 13% O ₂ (at min-at max)	mg/Nm³	19.3 - 12.1
Fuel Pellet	mm	Ø 6 L=3÷40
Hopper capacity	kg	17
Hourly consumption (at min-at max)	kg/h	0,5 - 2,1
Autonomy (at min-at max)	h	32 - 8
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	346
Operating electrical absorption (at max)	W	77
Chimney flue depression (at min-at max)	Pa	7.7 - 11.6
Mass of smoke (at min-at max)	g/sec	2,2 - 5,0
Exhaust fumes temperature (at min-at max)	°C	110 - 240
Distance from material comb. (back/side/under)	mm	200 / 200 / 0
Distance to material comb. (front/top)	mm	2000 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	130
Ducting outlet (C)	Ø mm	0
Ductable up to	m	0

PLUS

 Bi-Flux smoke outlet	 Airtight pellet stove	 Silk-screened glass door
 Integrated Wi-Fi and Bluetooth	 Integrated temperature sensor	 Smart Heat
 Silent		

AVAILABLE FINISHES

7020036		Steel White	EAN 8053859012696
7020037		Steel Titanium	EAN 8053859012702
7020038		Steel Black	EAN 8053859012719

OPTIONAL

5019012	Pellet stove remote control	EAN 8053859011965
---------	-----------------------------	-------------------


CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BImSchV 2015
Regensburg
München
Stuttgart
Aachen




EN 14785:2006
CE

STOVE PACKAGE



L (cm)	H (cm)	P (cm)
80	130	68
Volume (m³)	0,71	
Gross weight (kg)	99	
Net weight (kg)	88	

STORAGE



N° (max)
1

TRANSPORT



60 pz