


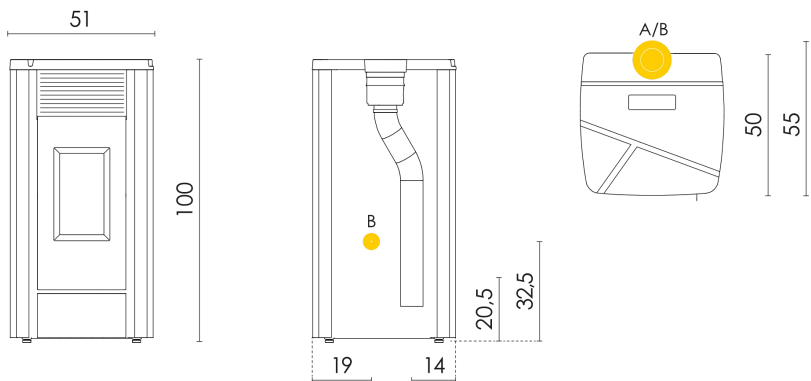

Pellet stoves Air

TECHNICAL DATA

|                                                     |        |               |
|-----------------------------------------------------|--------|---------------|
| Thermic Power (at min-at max)                       | kW     | 2,9 - 7,0     |
| Introduced thermal power (at max)                   | kW     | 7,9           |
| Water useful power (at min-at max)                  | kW     | - -           |
| Seasonal energy efficiency                          | ηs [%] | 85            |
| Useful efficiency (at min-at max)                   | %      | 90 - 89       |
| Heatable volume (at min-at max)                     | m³     | 83 - 200      |
| CO <sub>2</sub> (min-max)                           | %      | 7,8 - 12,0    |
| Emissions CO (13% O <sub>2</sub> ) (at min-at max)  | mg/Nm³ | 220 - 125     |
| Emissions OGC (13%O <sub>2</sub> ) (at min-at max)  | mg/Nm³ | 2,0- 2,0      |
| Emissions NOX (13% O <sub>2</sub> ) (at min-at max) | mg/Nm³ | 110 - 99      |
| Dust content at 13% O <sub>2</sub> (at min-at max)  | mg/Nm³ | 20 - 15       |
| Fuel Pellet                                         | mm     | Ø6 L=3÷40     |
| Hopper capacity                                     | kg     | 16            |
| Hourly consumption (at min-at max)                  | kg/h   | 0,6 - 1,7     |
| Autonomy (at min-at max)                            | h      | 27 - 9        |
| Supply and frequency                                | V-Hz   | 230-50        |
| Ignition electrical absorption                      | W      | 350           |
| Operating electrical absorption (at max)            | W      | 74            |
| Draught for chimney sizing calculation (EN13384-1)  | Pa     | 2             |
| Mass of smoke (at min-at max)                       | g/sec  | 3,0 - 5,0     |
| Exhaust fumes temperature (at min-at max)           | °C     | 164 - 239     |
| Distance from material comb. (back/side/under)      | mm     | 200 / 300 / 0 |
| Distance to material comb. (front/top)              | mm     | 650 / 750     |
| Exhaust fumes outlet (A)                            | Ø mm   | 80            |
| Combustion air inlet (B)                            | Ø mm   | 130           |
| Appliance Type (tightness)                          | Type   | CC50          |

PLUS

|                                       |                                |                               |
|---------------------------------------|--------------------------------|-------------------------------|
| Bi-Flux smoke outlet                  | Airtight pellet stove          | Easy Start brazier            |
| Connection to the external thermostat | Integrated Wi-Fi and Bluetooth | Integrated temperature sensor |
| Smart Heat                            | Silent                         | Duo-Shield combustion chamber |

AVAILABLE FINISHES

|         |  |                  |                   |
|---------|--|------------------|-------------------|
| 7026007 |  | Steel White      | EAN 8053859022787 |
| 7026008 |  | Steel Green Grey | EAN 8053859022794 |
| 7026009 |  | Steel Anthracite | EAN 8053859022800 |

CERTIFICATIONS

European standards  
Art. 15A B-VG 2015  
BlmSchV 2015  
Regensburg  
München  
Stuttgart  
Aachen

EN 16510-1:2022 / EN 16510-2-6:2022

CE

A+

STOVE PACKAGE

|  |                   |        |        |
|--|-------------------|--------|--------|
|  | L (cm)            | H (cm) | P (cm) |
|  | 80                | 117    | 60     |
|  | Volume (m³)       | 0,56   |        |
|  | Gross weight (kg) | 85     |        |
|  | Net weight (kg)   | 75     |        |

STORAGE

|       |          |
|-------|----------|
|       | N° (max) |
|       | 2        |
| MAX 2 |          |
| 1     |          |

TRANSPORT

|       |
|-------|
|       |
| 66 pz |