


Pellet stoves Air

TECHNICAL DATA

Thermic Power (at min-at max)	kW	2,5 - 5,5
Introduced thermal power (at max)	kW	6,1
Water useful power (at min-at max)	kW	- -
Seasonal energy efficiency	ηs [%]	86
Useful efficiency (at min-at max)	%	91 - 90
Heatable volume (at min-at max)	m ³	71 - 157
CO ₂ (min-max)	%	6,8 - 11,7
Emissions CO (13% O ₂) (at min-at max)	mg/Nm ³	238 - 140
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm ³	4,0 - 2,0
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm ³	140 - 129
Dust content at 13% O ₂ (at min-at max)	mg/Nm ³	20 - 15
Fuel Pellet	mm	Ø6 L=3÷40
Hopper capacity	kg	11
Hourly consumption (at min-at max)	kg/h	0,6 - 1,3
Autonomy (at min-at max)	h	18 - 8
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	345
Operating electrical absorption (at max)	W	50
Draught for chimney sizing calculation (EN13384-1)	Pa	2
Mass of smoke (at min-at max)	g/sec	2,6 - 3,9
Exhaust fumes temperature (at min-at max)	°C	113 - 163
Distance from material comb. (back/side/under)	mm	200 / 300 / 0
Distance to material comb. (front/top)	mm	650 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	130
Appliance Type (tightness)	Type	CC50

PLUS

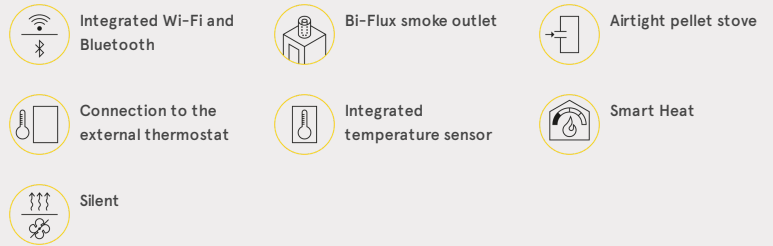

AVAILABLE FINISHES

7021016		Steel Black	EAN 8053859013266
7021017		Steel Titanium	EAN 8053859013273
7021018		Dark Gold	EAN 8053859013280

OPTIONAL

5019012	Pellet stove remote control	EAN 8053859011965
---------	-----------------------------	-------------------

CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BlmSchV 2015
Regensburg
München
Stuttgart
Aachen



EN 16510-1:2022 / EN 16510-2-6:2022
CE

A+

STOVE PACKAGE

	L (cm)	H (cm)	P (cm)
	80	117	60
	Volume (m ³)	0,56	
	Gross weight (kg)	83	
	Net weight (kg)	73	

STORAGE

	N° (max)
	2
MAX 2	
1	

TRANSPORT

66 pz