


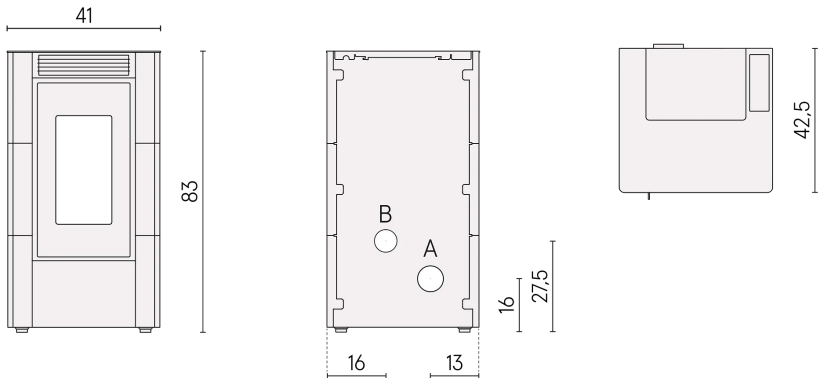

Pellet Air

TECHNICAL DATA

Thermic Power (at min-at max)	kW	2,6 - 5,5
Introduced thermal power (at max)	kW	6,2
Water useful power (at min-at max)	kW	- -
Seasonal energy efficiency	η_s [%]	83
Useful efficiency (at min-at max)	%	89 - 88
Heatable volume (at min-at max)	m ³	73 - 154
CO ₂ (min-max)	%	6,0 - 10,0
Emissions CO (13% O ₂) (at min-at max)	mg/Nm ³	220 - 125
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm ³	3 - 2
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm ³	120 - 99
Dust content at 13% O ₂ (at min-at max)	mg/Nm ³	20 - 10
Fuel Pellet	mm	Ø 6 L=3÷40
Hopper capacity	kg	11
Hourly consumption (at min-at max)	kg/h	0,6 - 1,3
Autonomy (at min-at max)	h	18 - 8
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	350
Operating electrical absorption (at max)	W	74
Chimney flue depression (at min-at max)	Pa	2 - 12
Mass of smoke (at min-at max)	g/sec	3,2 - 4,5
Exhaust fumes temperature (at min-at max)	°C	128 - 201
Distance from material comb. (back/side/under)	mm	300 / 200 / 0
Distance to material comb. (front/top)	mm	600 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	0
Ductable up to	m	0

PLUS

5 stars D.M. 186	Back exhaust	Remote control (optional)
Sealed Chamber	Cast iron burning pot	Connection to the external thermostat
Weekly programming	Integrated Wi-Fi and Bluetooth	

AVAILABLE FINISHES

7025097	Steel White	EAN 8053859022077
7025098	Steel Red Bordeaux	EAN 8053859022084
7025099	Steel Anthracite	EAN 8053859022091

OPTIONAL

5024010	Remote control with thermostat	EAN 8053859020943
---------	--------------------------------	-------------------

CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BImSchV 2015
Regensburg
München
Stuttgart
Aachen

EN 16510-1:2022/
EN 16510-2-6:2022

CE



STOVE PACKAGE

L (cm)	H (cm)	P (cm)
80	117	60
Volume (m ³)	0,56	
Gross weight (kg)	63	
Net weight (kg)	53	

STORAGE

N° (max)
2
MAX 2
1

TRANSPORT

66 pz
