


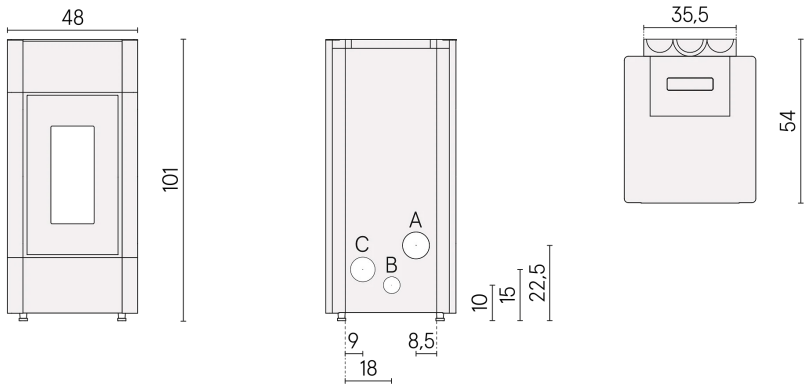

Pellet Air

TECHNICAL DATA

Thermic Power (at min-at max)	kW	2,5 - 8,5
Introduced thermal power (at max)	kW	9,7
Water useful power (at min-at max)	kW	- -
Seasonal energy efficiency	ηs [%]	83
Useful efficiency (at min-at max)	%	90 - 87
Heatable volume (at min-at max)	m³	70 - 238
CO ₂ (min-max)	%	6,3 - 12,0
Emissions CO (13% O ₂) (at min-at max)	mg/Nm³	297 - 160
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm³	5,0 - 3,0
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm³	120 - 140
Dust content at 13% O ₂ (at min-at max)	mg/Nm³	20 - 15
Fuel Pellet	mm	Ø 6 L=3÷40
Hopper capacity	kg	17
Hourly consumption (at min-at max)	kg/h	0,6 - 2,1
Autonomy (at min-at max)	h	28 - 8
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	340
Operating electrical absorption (at max)	W	106
Draught for chimney sizing calculation (EN13384-1)	Pa	2
Mass of smoke (at min-at max)	g/sec	3,1 - 6,0
Exhaust fumes temperature (at min-at max)	°C	125 - 229
Distance from material comb. (back/side/under)	mm	200 / 300 / 15
Distance to material comb. (front/top)	mm	1000 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	80
Ductable up to	m	7
Appliance Type (tightness)	Type	CC50

PLUS

4 stars +

Back exhaust

Upper exhaust (optional)

Concentric flue kit (optional)

Flexibility of installation

Cast iron door

Duction with 1 independent motor

Cast iron burning pot

Connection to the external thermostat

AVAILABLE FINISHES

7026060		Steel Anthracite	EAN 8053859023364
7026058		Steel White	EAN 8053859023340
7026059		Steel Red Bordeaux	EAN 8053859023357

CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BlmSchV 2015
Regensburg
München
Stuttgart
Aachen



EN 16510-1:2022 / EN 16510-2-6:2022
CE

STOVE PACKAGE

L (cm)	H (cm)	P (cm)
80	118	61
Volume (m³)	0,58	
Gross weight (kg)	85	
Net weight (kg)	75	

STORAGE

N° (max)
2
MAX 2
1

TRANSPORT

66 pz