


Certificate model name: ELLIOT 6 T1

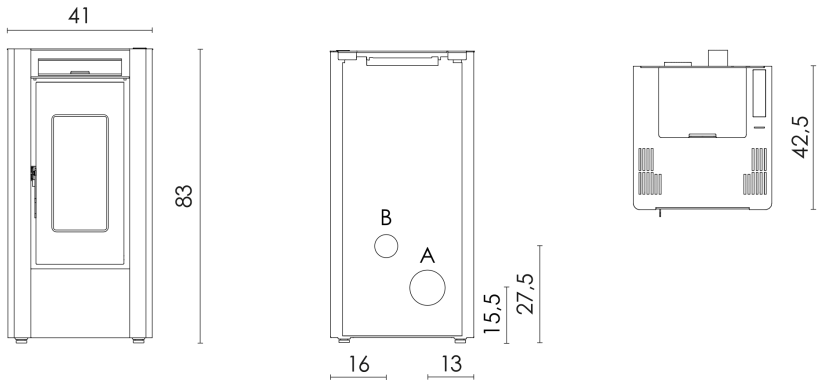

Pellet stoves Air

TECHNICAL DATA

Thermic Power (at min-at max)	kW	2,6 – 5,5
Introduced thermal power (at max)	kW	6,2
Water useful power (at min-at max)	kW	– –
Seasonal energy efficiency	ηs [%]	83
Useful efficiency (at min-at max)	%	88 – 88
Heatable volume (at min-at max)	m³	73 – 154
CO ₂ (min-max)	%	6,1– 10,0
Emissions CO (13% O ₂) (at min-at max)	mg/Nm³	220 – 125
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm³	3– 2
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm³	120 – 99
Dust content at 13% O ₂ (at min-at max)	mg/Nm³	20 – 15
Fuel Pellet	mm	Ø 6 L=3÷40
Hopper capacity	kg	11
Hourly consumption (at min-at max)	kg/h	0,6 – 1,3
Autonomy (at min-at max)	h	18 – 8
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	350
Operating electrical absorption (at max)	W	74
Chimney flue depression (at min-at max)	Pa	2 – 12
Mass of smoke (at min-at max)	g/sec	3,2 – 4,4
Exhaust fumes temperature (at min-at max)	°C	135 – 201
Distance from material comb. (back/side/under)	mm	300 / 200 / 0
Distance to material comb. (front/top)	mm	600 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	0
Ductable up to	m	0
Appliance Type (tightness)	Type	BE

PLUS

 Back exhaust

 Easy Start brazier

 Daily weekly programming

 Silent

 Cast iron burning pot

 Wi-Fi (optional)

 Connection to the external thermostat

AVAILABLE FINISHES

7025064		Steel White	EAN 8053859021704
7025065		Steel Red Bordeaux	EAN 8053859021711
7025066		Steel Anthracite	EAN 8053859021728

CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BlmSchV 2015
Regensburg
München
Stuttgart
Aachen


   



EN 16510-1:2022 / EN 16510-2-6:2022



STOVE PACKAGE



L (cm)	H (cm)	P (cm)
80	117	60
Volume (m³)	0,56	
Gross weight (kg)	63	
Net weight (kg)	53	

STORAGE

 MAX 2

N° (max)
2

TRANSPORT



66 pz