




EOS 6 BI-FLUX

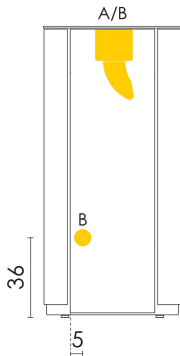

Certificate model name: EOS 6 BI-FLUX T1



Pellet stoves Air Plus

TECHNICAL DATA

Thermic Power (at min-at max)	kW	3,2 – 6,5
Introduced thermal power (at max)	kW	7,0
Water useful power (at min-at max)	kW	– –
Seasonal energy efficiency	ηs [%]	89
Useful efficiency (at min-at max)	%	90 – 92
Heatable volume (at min-at max)	m³	90 – 182
CO ₂ (min-max)	%	5,4– 10,2
Emissions CO (13% O ₂) (at min-at max)	mg/Nm³	163 – 125
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm³	1– 1
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm³	110 – 100
Dust content at 13% O ₂ (at min-at max)	mg/Nm³	15 – 15
Fuel Pellet	mm	Ø 6 L=3÷40
Hopper capacity	kg	20
Hourly consumption (at min-at max)	kg/h	0,7 – 1,4
Autonomy (at min-at max)	h	29 – 14
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	370
Operating electrical absorption (at max)	W	100
Chimney flue depression (at min-at max)	Pa	11 – 11
Mass of smoke (at min-at max)	g/sec	3,6 – 4,0
Exhaust fumes temperature (at min-at max)	°C	121 – 170
Distance from material comb. (back/side/under)	mm	150 / 200 / 0
Distance to material comb. (front/top)	mm	500 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	130
Ducting outlet (C)	Ø mm	0
Ductable up to	m	0

PLUS

- Airtight pellet stove
- Cast iron combustion chamber
- Ceramic glow plug
- Top and front ventilation
- Silent
- Integrated Wi-Fi and Bluetooth
- UPS ready External battery connection
- Silk-screened glass door
- Bi-Flux smoke outlet

AVAILABLE FINISHES

7025056		Steel Black	EAN 8053859021629
---------	--	-------------	-------------------

CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BImSchV 2015
Regensburg
München
Stuttgart
Aachen

EN 14785:2006
CE



STOVE PACKAGE

	L (cm)	H (cm)	P (cm)
	80	126	68
	Volume (m³)	0,69	
	Gross weight (kg)	113	
	Net weight (kg)	103	

STORAGE

	N° (max)
	2

TRANSPORT

60 pz