


## Pellet stoves Air

### TECHNICAL DATA

Thermic Power (at min-at max)	kW	2,8 - 6,0
Introduced thermal power (at max)	kW	6,7
Water useful power (at min-at max)	kW	- -
Seasonal energy efficiency	ηs [%]	86
Useful efficiency (at min-at max)	%	91 - 90
Heatable volume (at min-at max)	m <sup>3</sup>	78 - 168
CO <sub>2</sub> (min-max)	%	7,4 - 11,2
Emissions CO (13% O <sub>2</sub> ) (at min-at max)	mg/Nm <sup>3</sup>	150 - 100
Emissions OGC (13%O <sub>2</sub> ) (at min-at max)	mg/Nm <sup>3</sup>	1,0 - 1,0
Emissions NOX (13% O <sub>2</sub> ) (at min-at max)	mg/Nm <sup>3</sup>	115 - 120
Dust content at 13% O <sub>2</sub> (at min-at max)	mg/Nm <sup>3</sup>	19 - 15
Fuel Pellet	mm	Ø6 L=3÷40
Hopper capacity	kg	10
Hourly consumption (at min-at max)	kg/h	0,7 - 1,4
Autonomy (at min-at max)	h	14 - 7
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	370
Operating electrical absorption (at max)	W	86
Draught for chimney sizing calculation (EN13384-1)	Pa	2
Mass of smoke (at min-at max)	g/sec	2,9 - 4,3
Exhaust fumes temperature (at min-at max)	°C	130 - 186
Distance from material comb. (back/side/under)	mm	200 / 200 / 0
Distance to material comb. (front/top)	mm	1000 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	130
Appliance Type (tightness)	Type	CC50

### PLUS

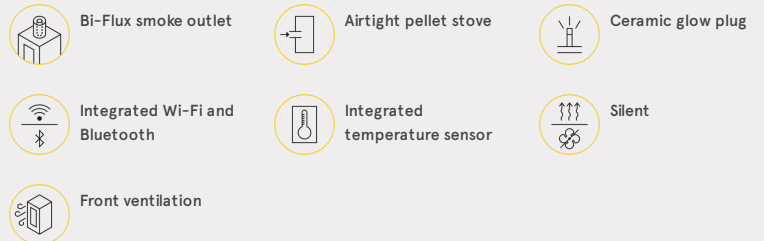

### AVAILABLE FINISHES

7023001	Steel Black	EAN 8053859018834
---------	-------------	-------------------

### OPTIONAL

5019012	Pellet stove remote control	EAN 8053859011965
---------	-----------------------------	-------------------

### CERTIFICATIONS

European standards  
Art. 15A B-VG 2015  
BImSchV 2015  
Regensburg  
München  
Stuttgart  
Aachen



EN 16510-1:2022 / EN 16510-2-6:2022  
CE



### STOVE PACKAGE

	L (cm)	H (cm)	P (cm)
	80	91	71
	Volume (m <sup>3</sup> )	0,52	
	Gross weight (kg)	129	
	Net weight (kg)	119	

### STORAGE

	N° (max)
	2
MAX 2	
1	

### TRANSPORT

57 pz