


Certificate model name: FLOYD 7.0

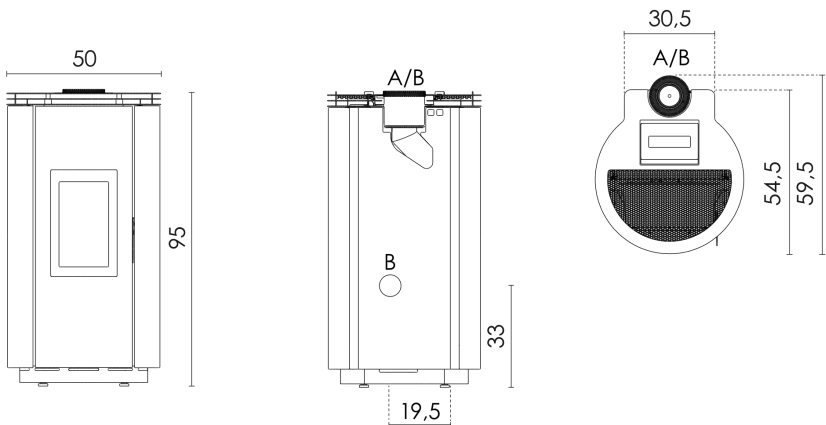

Pellet stoves Air

TECHNICAL DATA

Thermic Power (at min-at max)	kW	2,5 - 7,0
Introduced thermal power (at max)	kW	7,7
Water useful power (at min-at max)	kW	- -
Seasonal energy efficiency	ηs [%]	86
Useful efficiency (at min-at max)	%	91 - 90
Heatable volume (at min-at max)	m³	71 - 200
CO ₂ (min-max)	%	6,8 - 12,8
Emissions CO (13% O ₂) (at min-at max)	mg/Nm³	238 - 42
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm³	4- 1
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm³	140 - 117
Dust content at 13% O ₂ (at min-at max)	mg/Nm³	20 - 15
Fuel Pellet	mm	Ø 6 L=3÷40
Hopper capacity	kg	11
Hourly consumption (at min-at max)	kg/h	0,6 - 1,7
Autonomy (at min-at max)	h	18 - 6
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	345
Operating electrical absorption (at max)	W	49
Chimney flue depression (at min-at max)	Pa	2 - 10
Mass of smoke (at min-at max)	g/sec	2,6 - 4,6
Exhaust fumes temperature (at min-at max)	°C	113 - 190
Distance from material comb. (back/side/under)	mm	200 / 300 / 0
Distance to material comb. (front/top)	mm	1000 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	130
Ducting outlet (C)	Ø mm	0
Ductable up to	m	0
Appliance Type (tightness)	Type	CC50

PLUS

 Upper exhaust	 Airtight pellet stove	 Remote control (optional)
 Connection to the external thermostat	 Wi-Fi (optional)	 Daily weekly programming
 Cast iron burning pot		

AVAILABLE FINISHES

7021020		Steel White	EAN 8053859013303
7021022		Steel Anthracite	EAN 8053859013327

CERTIFICATIONS


European standards
Art. 15A B-VG 2015
BImSchV 2015
Regensburg
München
Stuttgart
Aachen

EN 14785:2006
CE



A+

STOVE PACKAGE



L (cm)	H (cm)	P (cm)
80	117	60
Volume (m³)	0,56	
Gross weight (kg)	75	
Net weight (kg)	65	

STORAGE




MAX 2

1

N° (max)
2

TRANSPORT



66 pz