


FRAME 9 T2

Certificate model name: FRAME 9 T2

www.cadelsrl.com

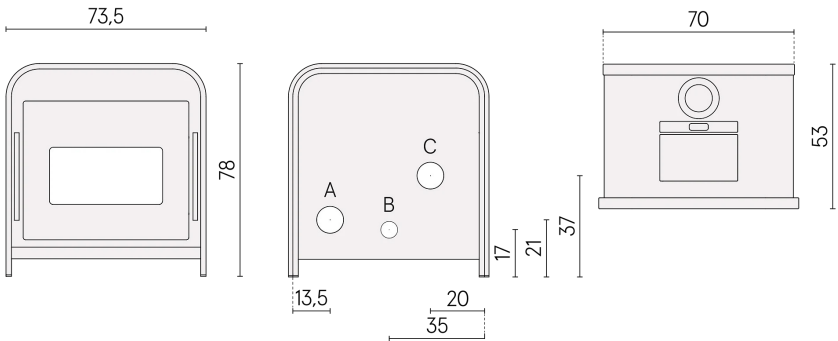

Pellet Air

TECHNICAL DATA

Thermic Power (at min-at max)	kW	3,5 - 9,0
Introduced thermal power (at max)	kW	9,9
Water useful power (at min-at max)	kW	- - -
Seasonal energy efficiency	η_s [%]	85
Useful efficiency (at min-at max)	%	91 - 90
Heatable volume (at min-at max)	m ³	98 - 252
CO ₂ (min-max)	%	5,4 - 9,1
Emissions CO (13% O ₂) (at min-at max)	mg/Nm ³	140 - 125
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm ³	2 - 2
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm ³	99 - 120
Dust content at 13% O ₂ (at min-at max)	mg/Nm ³	20 - 15
Fuel Pellet	mm	Ø6 L=3÷40
Hopper capacity	kg	15
Hourly consumption (at min-at max)	kg/h	0,8 - 2,0
Autonomy (at min-at max)	h	19 - 8
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	316
Operating electrical absorption (at max)	W	114
Chimney flue depression (at min-at max)	Pa	2 - 11
Mass of smoke (at min-at max)	g/sec	4,7 - 7,1
Exhaust fumes temperature (at min-at max)	°C	90 - 143
Distance from material comb. (back/side/under)	mm	100 / 250 / 0
Distance to material comb. (front/top)	mm	1000 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	0
Ductable up to	m	0

PLUS



5 stars D.M. 186



Back exhaust



Ducting kit (optional)



Sealed Chamber



Cast iron burning pot



Connection to the external thermostat



Comfort mode - Maximum silence



Cast iron inner



Weekly programming

AVAILABLE FINISHES

7025122		Steel Light Bronze	EAN 8053859022381
7025123		Steel Black	EAN 8053859022398

OPTIONAL

5018009	Ducting kit	EAN 8053859010333
5018013	Pellet loading chute kit	EAN 8053859010494

CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BlmSchV 2015
Regensburg
München
Stuttgart
Aachen



EN 16510-1:2022/
EN 16510-2-6:2022



STOVE PACKAGE

	L (cm)	H (cm)	P (cm)
	80	98	71
	Volume (m ³)	0,56	
	Gross weight (kg)	117	
	Net weight (kg)	105	

STORAGE

	N° (max)
	2
MAX 2	
1	

TRANSPORT

57 pz