


FRAME 9 UP-TWIN T2



Certificate model name: FRAME 9 UP-TWIN T2

www.cadelsrl.com

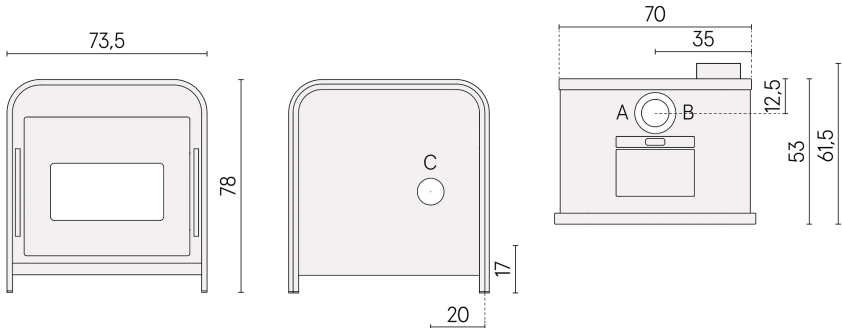

Pellet Air

TECHNICAL DATA

Thermic Power (at min-at max)	kW	3,5 - 9,0
Introduced thermal power (at max)	kW	9,9
Water useful power (at min-at max)	kW	- - -
Seasonal energy efficiency	ηs [%]	85
Useful efficiency (at min-at max)	%	91 - 90
Heatable volume (at min-at max)	m³	98 - 252
CO ₂ (min-max)	%	5,4 - 9,1
Emissions CO (13% O ₂) (at min-at max)	mg/Nm³	140 - 125
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm³	2 - 2
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm³	99 - 120
Dust content at 13% O ₂ (at min-at max)	mg/Nm³	20 - 15
Fuel Pellet	mm	Ø 6 L=3÷40
Hopper capacity	kg	15
Hourly consumption (at min-at max)	kg/h	0,8 - 2,0
Autonomy (at min-at max)	h	19 - 8
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	316
Operating electrical absorption (at max)	W	114
Chimney flue depression (at min-at max)	Pa	2 - 11
Mass of smoke (at min-at max)	g/sec	4,7 - 7,1
Exhaust fumes temperature (at min-at max)	°C	90 - 143
Distance from material comb. (back/side/under)	mm	100 / 250 / 0
Distance to material comb. (front/top)	mm	1000 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	0
Ductable up to	m	0

PLUS

5 stars D.M. 186

Upper exhaust

Integrated concentric outlet (80-130 mm)

Ducting kit (optional)

Sealed Chamber

Cast iron burning pot

Connection to the external thermostat

Comfort mode - Maximum silence

Cast iron inner

AVAILABLE FINISHES

7025124		Steel Light Bronze	EAN 8053859022404
7025125		Steel Black	EAN 8053859022411

OPTIONAL

5018009	Ducting kit	EAN 8053859010333
5018013	Pellet loading chute kit	EAN 8053859010494

CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BImSchV 2015
Regensburg
München
Stuttgart
Aachen

EN 16510-1:2022/
EN 16510-2-6:2022

A+

STOVE PACKAGE

L (cm)	H (cm)	P (cm)
80	98	71
Volume (m³)	0,56	
Gross weight (kg)	120	
Net weight (kg)	108	

STORAGE

N° (max)
2

TRANSPORT

57 pz