


Certificate model name: GLOBE AIRTIGHT

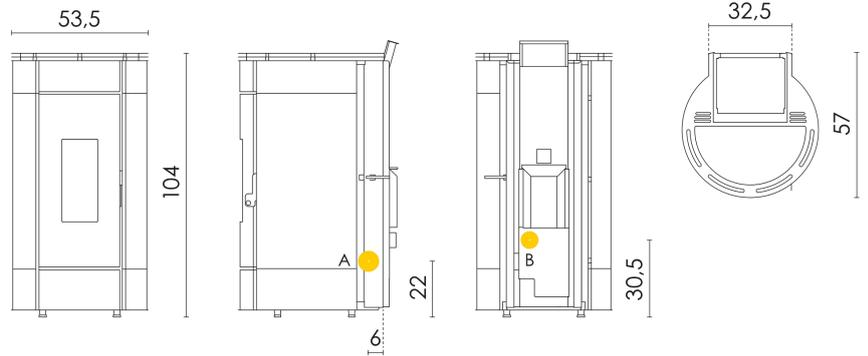

Pellet stoves Air

TECHNICAL DATA

Thermic Power (at min-at max)	kW	3,3 - 11,0
Introduced thermal power (at max)	kW	12,1
Water useful power (at min-at max)	kW	- -
Seasonal energy efficiency	η_s [%]	87
Useful efficiency (at min-at max)	%	93 - 91
Heatable volume (at min-at max)	m ³	94 - 314
CO ₂ (min-max)	%	6,6 - 12,7
Emissions CO (13% O ₂) (at min-at max)	mg/Nm ³	268 - 27
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm ³	7 - 2
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm ³	105 - 119
Dust content at 13% O ₂ (at min-at max)	mg/Nm ³	11 - 14
Fuel Pellet	mm	Ø6 L=3÷40
Hopper capacity	kg	22
Hourly consumption (at min-at max)	kg/h	0,7 - 2,6
Autonomy (at min-at max)	h	30 - 8
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	360
Operating electrical absorption (at max)	W	137.3
Chimney flue depression (at min-at max)	Pa	9 - 10
Mass of smoke (at min-at max)	g/sec	3,7 - 7,1
Exhaust fumes temperature (at min-at max)	°C	96 - 190
Distance from material comb. (back/side/under)	mm	200 / 300 / 0
Distance to material comb. (front/top)	mm	1000 / 0
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	0
Ductable up to	m	0
Appliance Type (tightness)	Type	CC50

PLUS

- Airtight pellet stove
- Easy Start brazier
- Daily weekly programming
- Connection to the external thermostat
- Integrated temperature sensor
- Smart Heat
- Silent
- Rear lateral smoke outlet

AVAILABLE FINISHES

7019048	Steel Anthracite	EAN 8053859011385
7019049	Steel White	EAN 8053859011392
7019050	Steel Moka	EAN 8053859011408

OPTIONAL

5019012	Pellet stove remote control	EAN 8053859011965
5020017	Kit wi-fi navel stand alone	EAN 8053859013228
5018011	Concentric kit 80f-130m (fr)	EAN 8053859010357
5019004	Upper exhaust kit	EAN 8053859010975

CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BImSchV 2015
Regensburg
München
Stuttgart
Aachen

EN 14785:2006
CE



STOVE PACKAGE

	L (cm)	H (cm)	P (cm)
	80	125	71
	Volume (m ³)	0,71	
	Gross weight (kg)	108	
	Net weight (kg)	98	

STORAGE

	N° (max)
	1

TRANSPORT

	57 pz
--	-------