


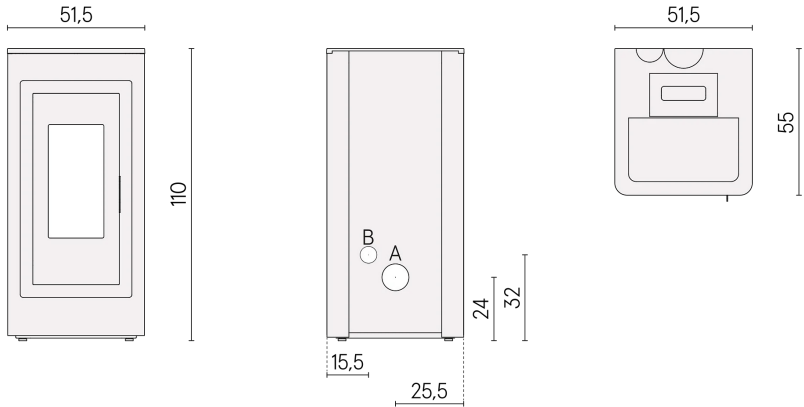


Pellet Air

TECHNICAL DATA

Thermic Power (at min-at max)	kW	3,0 - 10,5
Introduced thermal power (at max)	kW	11,6
Water useful power (at min-at max)	kW	- -
Seasonal energy efficiency	η_s [%]	86
Useful efficiency (at min-at max)	%	90 - 90
Heatable volume (at min-at max)	m ³	84 - 294
CO ₂ (min-max)	%	6,3 - 11,3
Emissions CO (13% O ₂) (at min-at max)	mg/Nm ³	230 - 159
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm ³	5- 5
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm ³	130 - 100
Dust content at 13% O ₂ (at min-at max)	mg/Nm ³	20 - 15
Fuel Pellet	mm	Ø6 L=3÷40
Hopper capacity	kg	25
Hourly consumption (at min-at max)	kg/h	0,7 - 2,5
Autonomy (at min-at max)	h	36 - 10
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	340
Operating electrical absorption (at max)	W	110
Chimney flue depression (at min-at max)	Pa	8 - 12
Mass of smoke (at min-at max)	g/sec	4,0 - 8,0
Exhaust fumes temperature (at min-at max)	°C	114 - 210
Distance from material comb. (back/side/under)	mm	200 / 300 / 0
Distance to material comb. (front/top)	mm	1000 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	0
Ductable up to	m	0

PLUS

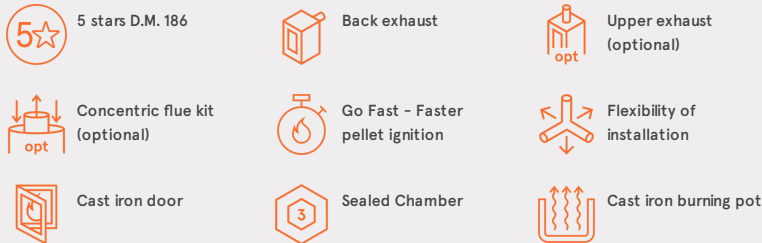

AVAILABLE FINISHES

7022080	Steel White	EAN 8053859015703
7022081	Steel Red Bordeaux	EAN 8053859015710
7022082	Steel Anthracite	EAN 8053859015727
7022083	Steel Light Bronze	EAN 8053859015734
7022084	Steel Titanium	EAN 8053859015741

OPTIONAL

5022002	Upper exhaust + concent kit	EAN 8053859015543
---------	-----------------------------	-------------------

CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BlmSchV 2015
Regensburg
München
Stuttgart
Aachen

EN 16510-1:2022/
EN 16510-2-6:2022



STOVE PACKAGE

L (cm)	H (cm)	P (cm)
80	126	68
Volume (m ³)	0,69	
Gross weight (kg)	121	
Net weight (kg)	111	

STORAGE

N° (max)
1

TRANSPORT

60 pz
