


Pellet stoves Air

TECHNICAL DATA

Thermic Power (at min-at max)	kW	2,7 - 9,3
Introduced thermal power (at max)	kW	10,5
Water useful power (at min-at max)	kW	- -
Seasonal energy efficiency	ηs [%]	84
Useful efficiency (at min-at max)	%	94 - 89
Heatable volume (at min-at max)	m ³	77 - 265
CO ₂ (min-max)	%	7,1- 12,5
Emissions CO (13% O ₂) (at min-at max)	mg/Nm ³	265 - 107
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm ³	3,2- 2,1
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm ³	108 - 119
Dust content at 13% O ₂ (at min-at max)	mg/Nm ³	18 - 19
Fuel Pellet	mm	Ø6 L=3÷40
Hopper capacity	kg	12
Hourly consumption (at min-at max)	kg/h	0,6 - 2,2
Autonomy (at min-at max)	h	19 - 5
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	346
Operating electrical absorption (at max)	W	114
Draught for chimney sizing calculation (EN13384-1)	Pa	2
Mass of smoke (at min-at max)	g/sec	2,8 - 5,7
Exhaust fumes temperature (at min-at max)	°C	90 - 200
Distance from material comb. (back/side/under)	mm	200 / 200 / 0
Distance to material comb. (front/top)	mm	1000 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Appliance Type (tightness)	Type	CC50

PLUS

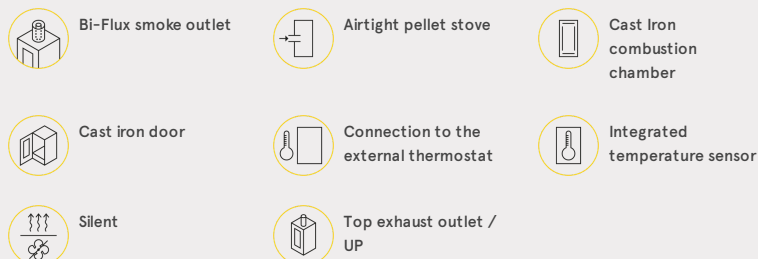

AVAILABLE FINISHES

7020007	Steel Black	EAN 8053859011972
---------	-------------	-------------------

OPTIONAL

5019012	Pellet stove remote control	EAN 8053859011965
5018013	Pellet loading chute kit	EAN 8053859010494

CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BImSchV 2015
Regensburg
München
Stuttgart
Aachen



EN 14785:2006
CE

A+

STOVE PACKAGE

	L (cm)	H (cm)	P (cm)
	80	72	71
Volume (m ³)			0,41
Gross weight (kg)			104
Net weight (kg)			95

STORAGE

	N° (max)
	2
MAX 2	
1	

TRANSPORT

57 pz