


Certificate model name: MOON

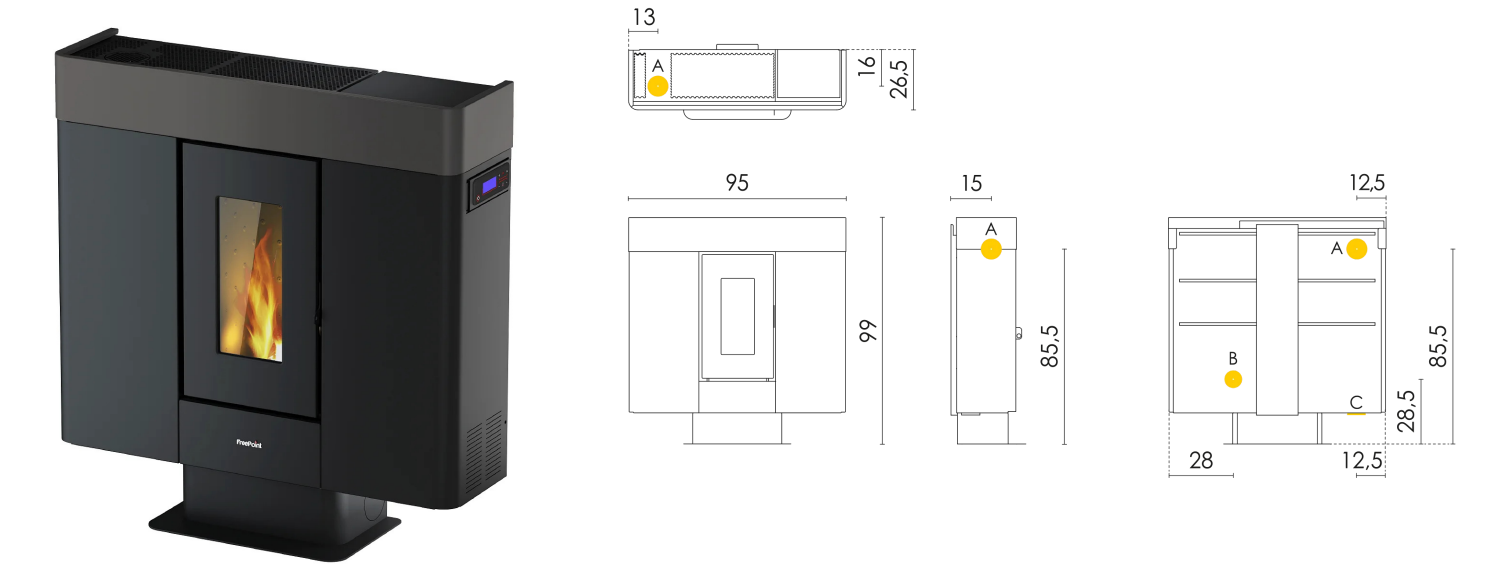

Pellet stoves Air Plus

TECHNICAL DATA

Thermic Power (at min-at max)	kW	3,0 - 10,0
Introduced thermal power (at max)	kW	11,0
Water useful power (at min-at max)	kW	- -
Seasonal energy efficiency	ηs [%]	87
Useful efficiency (at min-at max)	%	94 - 91
Heatable volume (at min-at max)	m³	86 - 285
CO ₂ (min-max)	%	8,9 - 14,0
Emissions CO (13% O ₂) (at min-at max)	mg/Nm³	174 - 119
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm³	5- 4
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm³	108 - 104
Dust content at 13% O ₂ (at min-at max)	mg/Nm³	10 - 17
Fuel Pellet	mm	Ø6 L=3÷40
Hopper capacity	kg	15
Hourly consumption (at min-at max)	kg/h	0,7 - 2,2
Autonomy (at min-at max)	h	23 - 7
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	340
Operating electrical absorption (at max)	W	85.2
Chimney flue depression (at min-at max)	Pa	9 - 10
Mass of smoke (at min-at max)	g/sec	2,5 - 5,6
Exhaust fumes temperature (at min-at max)	°C	110 - 200
Distance from material comb. (back/side/under)	mm	0 / 300 / 0
Distance to material comb. (front/top)	mm	2000 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	80
Ductable up to	m	6
Appliance Type (tightness)	Type	CC50

PLUS

 Airtight pellet stove	 Cast iron door	 Living Fire round cast iron brazier
 Integrated Wi-Fi and Bluetooth	 Integrated temperature sensor	 Connection to the external thermostat
 Independent ducting fan	 Rear ducting	

AVAILABLE FINISHES

7020013		Steel Titanium	EAN 8053859012030
7020014		Steel Moka	EAN 8053859012047

OPTIONAL

5022005	Upper exhaust kit	EAN 8053859017776
5019012	Pellet stove remote control	EAN 8053859011965

CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BlmSchV 2015
Regensburg
München
Stuttgart
Aachen


EN 14785:2006

CE




A+

STOVE PACKAGE



L (cm)	H (cm)	P (cm)
80	118	103
Volume (m³)	0,97	
Gross weight (kg)	118.3	
Net weight (kg)	103	

STORAGE



N° (max)
1

TRANSPORT



39 pz