QUASIMODO 9 UP-TWIN

Certificate model name: QUASIMODO 9 UP-TWIN T2

www.cadelsrl.com

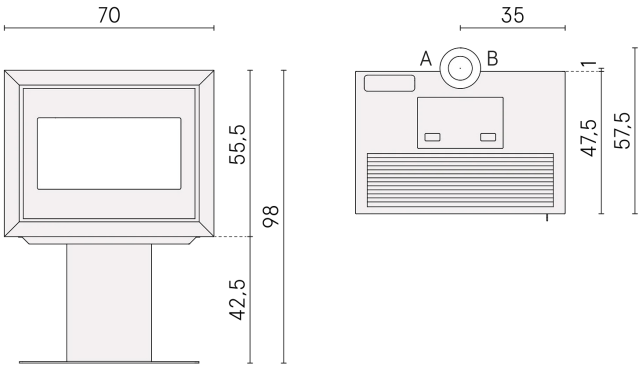

Pellet Air

TECHNICAL DATA

Thermic Power (at min-at max)	kW	3,5 - 9,0
Introduced thermal power (at max)	kW	9,9
Water useful power (at min-at max)	kW	_ - _
Seasonal energy efficiency	ηs [%]	85
Useful efficiency (at min-at max)	%	91 - 90
Heatable volume (at min-at max)	m³	98 - 252
CO_2 (min-max)	%	5,4- 9,1
Emissions CO (13% O_2) (at min-at max)	mg/Nm³	140 - 125
Emissions OGC (13%O_2) (at min-at max)	mg/Nm³	2,0- 2,0
Emissions NOX (13% O_2) (at min-at max)	mg/Nm³	120 - 99
Dust content at 13% O_2 (at min-at max)	mg/Nm³	20 - 15
Fuel Pellet	mm	Ø6 L=3÷40
Hopper capacity	kg	12
Hourly consumption (at min-at max)	kg/h	0,8 - 2,0
Autonomy (at min-at max)	h	14 - 6
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	316
Operating electrical absorption (at max)	W	114
Draught for chimney sizing calculation (EN13384-1)	Pa	2
Mass of smoke (at min-at max)	g/sec	4,7 - 7,1
Exhaust fumes temperature (at min-at max)	°C	90 - 143
Distance from material comb. (back/side/under)	mm	200 / 200 / 0
Distance to material comb. (front/top)	mm	1000 / 750
Exhaust fumes outlet (A)	Ø mm	130
Combustion air inlet (B)	Ø mm	130
Appliance Type (tightness)	Type	CC50

PLUS

- Upper exhaust
- Cast iron burning pot
- Connection to the external thermostat
- Comfort mode - Maximum silence
- Cast iron inner
- Weekly programming
- Integrated concentric outlet (80-130 mm)
- Integrated Wi-Fi and Bluetooth

AVAILABLE FINISHES

7025126	Steel Black	EAN 8053859022428

OPTIONAL

5018013	Pellet loading chute kit	EAN 8053859010494

CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BImSchV 2015
Regensburg
München
Stuttgart
Aachen

EN 16510-1:2022 / EN 16510-2-6:2022

CE

A+

STOVE PACKAGE



L (cm)	H (cm)	P (cm)
80	72	71

Volume (m³)	0,41
Gross weight (kg)	103
Net weight (kg)	95

STORAGE

N° (max)
2

TRANSPORT



57 pz

Rev. 11112026