


Certificate model name: ROXY

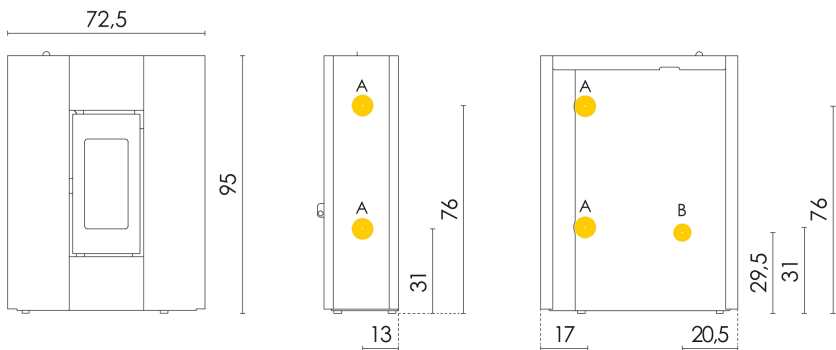

Pellet stoves Air

TECHNICAL DATA

Thermic Power (at min-at max)	kW	2,7 - 7,0
Introduced thermal power (at max)	kW	7,8
Water useful power (at min-at max)	kW	- - -
Seasonal energy efficiency	ηs [%]	85
Useful efficiency (at min-at max)	%	93 - 89
Heatable volume (at min-at max)	m³	77 - 200
CO ₂ (min-max)	%	7,0- 12,2
Emissions CO (13% O ₂) (at min-at max)	mg/Nm³	183 - 129
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm³	7 - 4
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm³	103 - 116
Dust content at 13% O ₂ (at min-at max)	mg/Nm³	19 - 14
Fuel Pellet	mm	Ø6 L=3÷40
Hopper capacity	kg	12
Hourly consumption (at min-at max)	kg/h	0,6 - 1,7
Autonomy (at min-at max)	h	20 - 7
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	345
Operating electrical absorption (at max)	W	72
Chimney flue depression (at min-at max)	Pa	10 - 11
Mass of smoke (at min-at max)	g/sec	3,0 - 4,9
Exhaust fumes temperature (at min-at max)	°C	89 - 184
Distance from material comb. (back/side/under)	mm	40 / 250 / 0
Distance to material comb. (front/top)	mm	600 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	0
Ductable up to	m	0

PLUS

Airtight pellet stove

Cast iron door

Easy Start brazier

Integrated temperature sensor

Connection to the external thermostat

Smart Heat

Silent

AVAILABLE FINISHES

7019063		Steel Red Bordeaux	EAN 8053859011538
7019064		Steel White	EAN 8053859011545
7019065		Steel Anthracite	EAN 8053859011552

CERTIFICATIONS

European standards
BlmSchV 2015
Regensburg
München
Stuttgart
Aachen

EN 14785:2006

CE

A+

STOVE PACKAGE

L (cm) H (cm) P (cm)

80	117	60
----	-----	----

Volume (m³)

0,56

Gross weight (kg)

73

Net weight (kg)

63

STORAGE

MAX 2

N° (max)

2

TRANSPORT

66 pz