


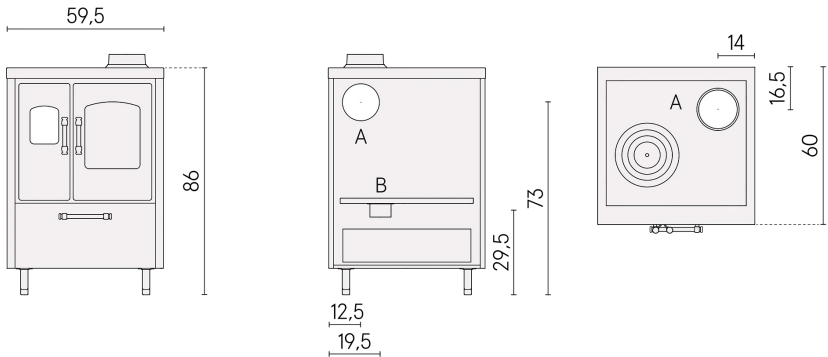

Wood stoves

TECHNICAL DATA

Thermic Power (at min-at max)	kW	0,0 - 6,5
Introduced thermal power (at max)	kW	7,7
Water useful power (at min-at max)	kW	- -
Seasonal energy efficiency	ηs [%]	75
Useful efficiency (at min-at max)	%	0 - 85
Heatable volume (at min-at max)	m³	0 - 185
CO ₂ (min-max)	%	0,0 - 9,2
Emissions CO (13% O ₂) (at min-at max)	mg/Nm³	0 - 1062
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm³	0 - 64
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm³	0 - 90
Dust content at 13% O ₂ (at min-at max)	mg/Nm³	0 - 21
Fuel Legna	mm	max L 330
Hopper capacity	kg	0
Hourly consumption (at min-at max)	kg/h	0,0 - 1,8
Autonomy (at min-at max)	h	0 - 0
Ignition electrical absorption	W	0
Operating electrical absorption (at max)	W	0
Chimney flue depression (at min-at max)	Pa	0 - 12
Mass of smoke (at min-at max)	g/sec	0,0 - 6,3
Exhaust fumes temperature (at min-at max)	°C	0 - 207
Distance from material comb. (back/side/under)	mm	40 / 20 / 0
Distance to material comb. (front/top)	mm	1000 / 750
Exhaust fumes outlet (A)	Ø mm	140
Combustion air inlet (B)	Ø mm	80
Ducting outlet (C)	Ø mm	0
Ductable up to	m	0

PLUS



Cast iron door



Cooking



View on the Oven



Refractory stone



Upper and back exhaust



Built-in



Free Standing

AVAILABLE FINISHES

71220026		Steel Anthracite	EAN 8053859016472
71220027		Steel White	EAN 8053859016489
71220028		Steel Red Bordeaux	EAN 8053859016496

OPTIONAL

5020006	Stainless steel plinth	EAN 8053859012603
5020008	Inox h4 upstand smart 60	EAN 8053859012627
5020009	Inox h6 upstand smart 60	EAN 8053859012634
5020014	Top	EAN 8053859012689
5020005	Feet smart 60/80	EAN 8053859012597
5021005	Connector pipe 140-150mm	EAN 8053859014256

CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BlmSchV 2015
Regensburg
München
Stuttgart
Aachen




EN 16510-1:2022/
EN 16510-2-3:2022



A+

STOVE PACKAGE



L (cm)	H (cm)	P (cm)
80	103	81
Volume (m³)	0,47	
Gross weight (kg)	136	
Net weight (kg)	123	

STORAGE



N° (max)
1

TRANSPORT

