

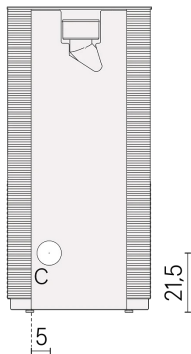


SPIN PLUS 9 AIRTECH UP-TWIN

CADEL

Certificate model name: SPIN PLUS 9 UP-TWIN T1

www.cadelsrl.com

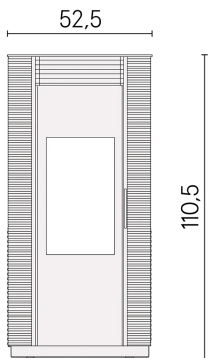

Pellet Air Plus

TECHNICAL DATA

Thermic Power (at min-at max)	kW	3,2 - 8,5
Introduced thermal power (at max)	kW	9,4
Water useful power (at min-at max)	kW	- -
Seasonal energy efficiency	ηs [%]	87
Useful efficiency (at min-at max)	%	90 - 90
Heatable volume (at min-at max)	m³	90 - 238
CO ₂ (min-max)	%	5,4 - 10,7
Emissions CO (13% O ₂) (at min-at max)	mg/Nm³	163 - 125
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm³	1 - 1
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm³	110 - 100
Dust content at 13% O ₂ (at min-at max)	mg/Nm³	15 - 15
Fuel Pellet	mm	Ø6 L=3÷40
Hopper capacity	kg	20
Hourly consumption (at min-at max)	kg/h	0,7 - 1,9
Autonomy (at min-at max)	h	29 - 11
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	370
Operating electrical absorption (at max)	W	110
Chimney flue depression (at min-at max)	Pa	11 - 11
Mass of smoke (at min-at max)	g/sec	3,6 - 5,3
Exhaust fumes temperature (at min-at max)	°C	121 - 216
Distance from material comb. (back/side/under)	mm	150 / 200 / 0
Distance to material comb. (front/top)	mm	500 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	130
Ducting outlet (C)	Ø mm	80
Ductable up to	m	8

PLUS



5 stars D.M. 186



Upper exhaust



Integrated concentric outlet (80-130 mm)



Go Fast - Faster pellet ignition



Airtech - Automatic brazier cleaning



UPS Ready



Duction with 1 independent motor



Remote control (optional)



Sealed Chamber

AVAILABLE FINISHES

7024011	Cast Iron Black	EAN 8053859020646
7024012	Steel Titanium	EAN 8053859020653
7024016	Steel Light Bronze	EAN 8053859020721

OPTIONAL

5024010	Remote control with thermostat	EAN 8053859020943
5024006	Kit ups ready	EAN 8053859020448

CERTIFICATIONS


European standards
Art. 15A B-VG 2015
BlmSchV 2015
Regensburg
München
Stuttgart
Aachen

EN 16510-1:2022/
EN 16510-2-6:2022

CE



STOVE PACKAGE




L (cm)	H (cm)	P (cm)
80	126	68
Volume (m³)	0,69	
Gross weight (kg)	113	
Net weight (kg)	103	

STORAGE



N° (max)
1

TRANSPORT



60 pz