


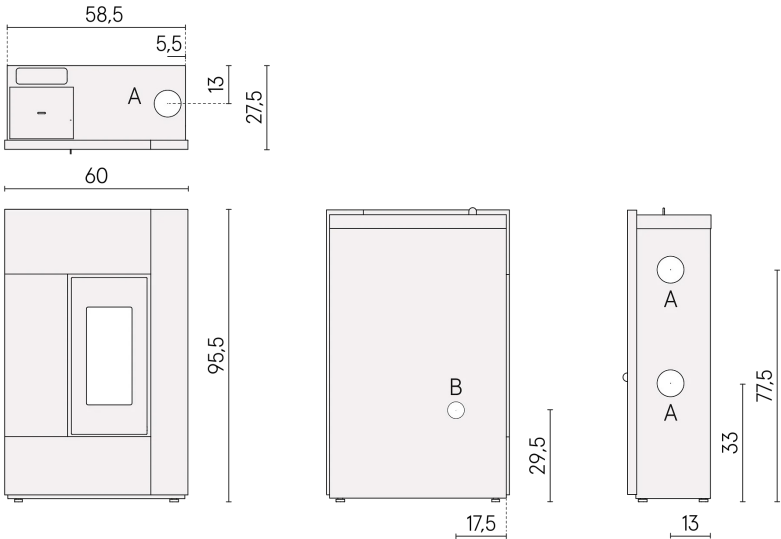

Pellet Air

TECHNICAL DATA

Thermic Power (at min-at max)	kW	2,5 - 5,1
Introduced thermal power (at max)	kW	5,8
Water useful power (at min-at max)	kW	- -
Seasonal energy efficiency	ηs [%]	83
Useful efficiency (at min-at max)	%	90 - 88
Heatable volume (at min-at max)	m³	71 - 146
CO ₂ (min-max)	%	6,4- 9,4
Emissions CO (13% O ₂) (at min-at max)	mg/Nm³	295 - 125
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm³	2- 2
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm³	110 - 99
Dust content at 13% O ₂ (at min-at max)	mg/Nm³	15 - 15
Fuel Pellet	mm	Ø 6 L=3÷40
Hopper capacity	kg	12
Hourly consumption (at min-at max)	kg/h	0,6 - 1,2
Autonomy (at min-at max)	h	20 - 10
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	374
Operating electrical absorption (at max)	W	69
Chimney flue depression (at min-at max)	Pa	9 - 11
Mass of smoke (at min-at max)	g/sec	3,0 - 4,3
Exhaust fumes temperature (at min-at max)	°C	109 - 200
Distance from material comb. (back/side/under)	mm	40 / 250 / 0
Distance to material comb. (front/top)	mm	600 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	0
Ductable up to	m	0

PLUS

5 stars D.M. 186	Upper exhaust	Cast iron door
Sealed Chamber	Cast iron burning pot	Comfort mode - Maximum silence
Weekly programming	Integrated Wi-Fi and Bluetooth	

AVAILABLE FINISHES

7025110	Steel White	EAN 8053859022251
7025111	Steel Anthracite	EAN 8053859022268

OPTIONAL

5020001	90° curve kit smoke	EAN 8053859012474
---------	---------------------	-------------------

CERTIFICATIONS

European standards
 Art. 15A B-VG 2015
 BImSchV 2015
 Regensburg
 München
 Stuttgart
 Aachen

EN 16510-1:2022/
 EN 16510-2-6:2022



STOVE PACKAGE

L (cm)	H (cm)	P (cm)
80	117	61
Volume (m³)	0,57	
Gross weight (kg)	65	
Net weight (kg)	55	

STORAGE

N° (max)	2
MAX 2	1

TRANSPORT

66 pz
