


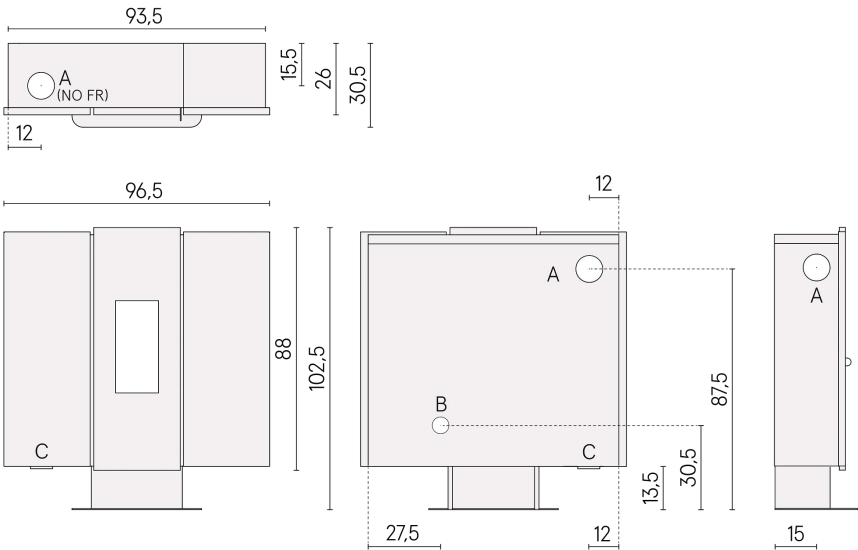

Pellet Air Plus

TECHNICAL DATA

Thermic Power (at min-at max)	kW	3,0 - 10,0
Introduced thermal power (at max)	kW	11,0
Water useful power (at min-at max)	kW	- - -
Seasonal energy efficiency	η_s [%]	87
Useful efficiency (at min-at max)	%	94 - 91
Heatable volume (at min-at max)	m ³	86 - 285
CO ₂ (min-max)	%	8,9 - 14,0
Emissions CO (13% O ₂) (at min-at max)	mg/Nm ³	174 - 119
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm ³	5 - 4
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm ³	108 - 104
Dust content at 13% O ₂ (at min-at max)	mg/Nm ³	10 - 17
Fuel Pellet	mm	Ø6 L=3÷40
Hopper capacity	kg	15
Hourly consumption (at min-at max)	kg/h	0,7 - 2,2
Autonomy (at min-at max)	h	23 - 7
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	340
Operating electrical absorption (at max)	W	85.2
Chimney flue depression (at min-at max)	Pa	9 - 10
Mass of smoke (at min-at max)	g/sec	2,5 - 5,6
Exhaust fumes temperature (at min-at max)	°C	110 - 200
Distance from material comb. (back/side/under)	mm	0 / 300 / 0
Distance to material comb. (front/top)	mm	2000 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	80
Ductable up to	m	6

PLUS



Concentric flue kit (optional)



Upper, back and lateral exhaust



Duction with 1 independent motor



Sealed Chamber



Cast iron burning pot



Connection to the external thermostat



Comfort mode - Maximum silence



Weekly programming

AVAILABLE FINISHES

7022165		Steel Red Bordeaux	EAN 8053859016779
7022166		Steel White	EAN 8053859016786

OPTIONAL

5018012	Concentric kit 80f-130f (fr)	EAN 8053859010364
5022005	Upper exhaust kit	EAN 8053859017776
5018011	Concentric kit 80f-130m (fr)	EAN 8053859010357


CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BlmSchV 2015
Regensburg
München
Stuttgart
Aachen

EN 16510-1:2022/
EN 16510-2-6:2022



STOVE PACKAGE



L (cm)	H (cm)	P (cm)
80	118	103
Volume (m ³)	0,97	
Gross weight (kg)	118.3	
Net weight (kg)	103	

STORAGE



N° (max)
1

TRANSPORT

