

MOON 10


AIR PLUS - Ducted pellet stoves

FreePoint

Certificate model name: MOON



Nominal power	kW	10
Reduced power	kW	3
Introduced thermal power (max)	kW	11
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Seasonal energy efficiency	ηs [%]	87
Nominal efficiency	%	91
Reduced efficiency	%	94,5
Heating volume (min-max)	m³	86 - 285
Nominal CO at 13% O ₂	%	0,0095
Reduced CO at 13% O ₂	%	0,0139
Emissions CO (13% O ₂) (min-max)	mg/Nm³	174 - 119
Emissions OGC (13% O ₂) (min-max)	mg/Nm³	5,0 - 4,0
Emissions NOX (13% O ₂) (min-max)	mg/Nm³	108 - 104
Dust content at 13% O ₂ (min-max)	mg/Nm³	10 - 17
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	15
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,66 - 2,24
Autonomy (min-max)	h	6,7 - 22,7
Ignition electrical absorption (max)	W	340
Operating electrical absorption (max)	W	85,2
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	10
Mass of smoke (min-max)	g/sec	2,5 - 5,6
Exhaust fumes temperature (max)	°C	215
Net weight	kg	103
Gross weight	kg	118,3
Exhaust fumes (A)	Ø mm	80
Hole combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	80
Ducting capability up to	m	6

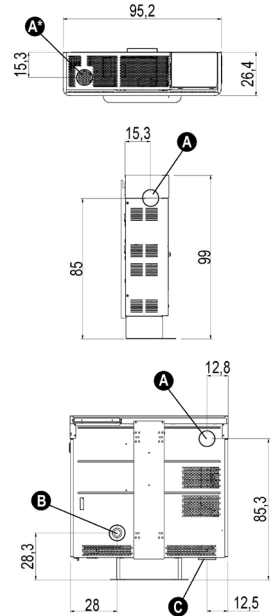

Art. 15A-B-VG 2015
BImSchV 2015
Regensburg
München
Stuttgart
Aachen



MATCH

7020014		Moka steel	EAN 8053859012047
7020013		Titanium steel	EAN 8053859012030

PLUS



AIRTIGHT sealed chamber



Integrated Wi-Fi



Living fire



Easy start



Daily weekly programming



Ductible with 1 independent fan



Cast iron burning pot



Silent function




Hopper, back and lateral exhaust



Connection to the room thermostat


STOVE PACKING



L (cm)	H (cm)	P (cm)
79	118,2	102,2


VOLUME (m³)
0,95

LINING PACKING



L (cm)	H (cm)	P (cm)

STOCKING



Nr (max)

2

TRANSPORT

