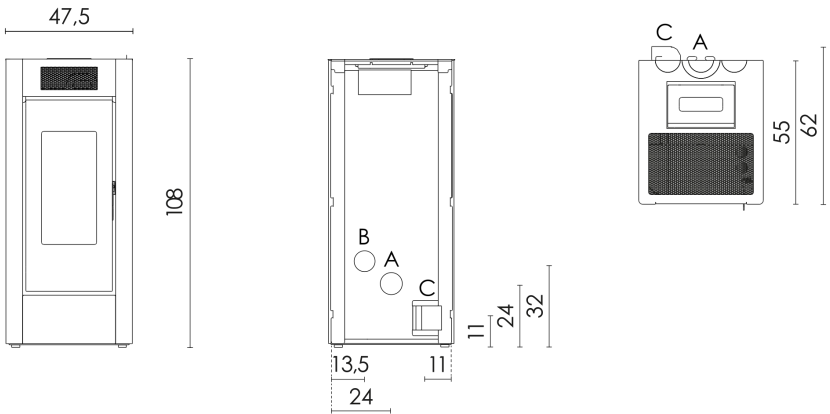


Certificate model name: SPARK 11 T1



Pellet stoves Air Plus

TECHNICAL DATA

Thermic Power (at min-at max)	kW	3,0 - 10,5
Introduced thermal power (at max)	kW	12,0
Water useful power (at min-at max)	kW	- - -
Seasonal energy efficiency	ηs [%]	84
Useful efficiency (at min-at max)	%	90 - 88
Heatable volume (at min-at max)	m³	84 - 294
CO ₂ (min-max)	%	6,3 - 11,4
Emissions CO (13% O ₂) (at min-at max)	mg/Nm³	230 - 159
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm³	5- 5
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm³	130 - 100
Dust content at 13% O ₂ (at min-at max)	mg/Nm³	20 - 15
Fuel Pellet	mm	Ø 6 L=3÷40
Hopper capacity	kg	25
Hourly consumption (at min-at max)	kg/h	0,7 - 2,5
Autonomy (at min-at max)	h	36 - 10
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	340
Operating electrical absorption (at max)	W	120
Chimney flue depression (at min-at max)	Pa	2 - 12
Mass of smoke (at min-at max)	g/sec	4,0 - 8,0
Exhaust fumes temperature (at min-at max)	°C	114 - 235
Distance from material comb. (back/side/under)	mm	200 / 300 / 0
Distance to material comb. (front/top)	mm	1000 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	80
Ductable up to	m	6
Appliance Type (tightness)	Type	CC50

PLUS

 Airtight pellet stove	 Remote control (optional)	 Silent
 Duction with 1 independent motor	 Wi-Fi (optional)	 Back exhaust
 Connection to the external thermostat	 Easy Start brazier	 Cast iron burning pot

AVAILABLE FINISHES

7022005		Steel White	EAN 8053859014737
7022006		Steel Red Bordeaux	EAN 8053859014744
7022007		Steel Anthracite	EAN 8053859014751


CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BlmSchV 2015
Regensburg
München
Stuttgart
Aachen


EN 16510-1:2022 / EN 16510-2-6:2022
CE



STOVE PACKAGE

	L (cm)	H (cm)	P (cm)
	80	126	68
	Volume (m³)	0,69	
	Gross weight (kg)	118	
	Net weight (kg)	108	

STORAGE

	N° (max)
	1

TRANSPORT


60 pz