


Certificate model name: TABLA

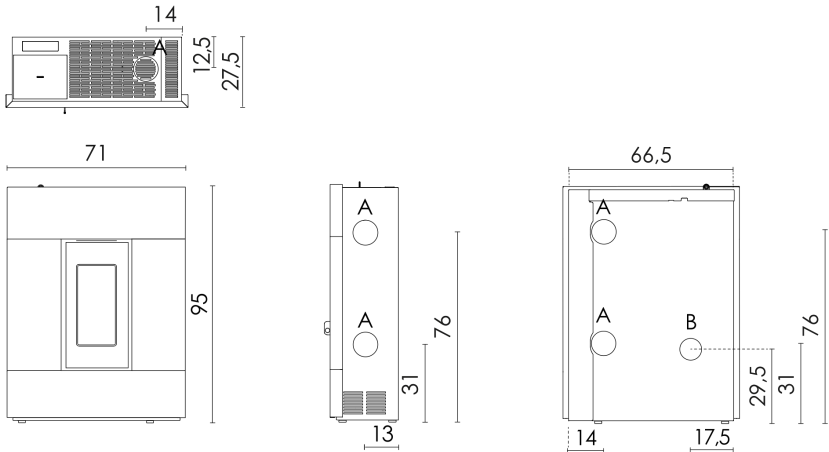

Pellet stoves Air

TECHNICAL DATA

Thermic Power (at min-at max)	kW	2,7 - 7,0
Introduced thermal power (at max)	kW	7,8
Water useful power (at min-at max)	kW	- -
Seasonal energy efficiency	ηs [%]	85
Useful efficiency (at min-at max)	%	93 - 89
Heatable volume (at min-at max)	m³	77 - 200
CO ₂ (min-max)	%	7,0- 12,2
Emissions CO (13% O ₂) (at min-at max)	mg/Nm³	183 - 129
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm³	7 - 4
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm³	103 - 116
Dust content at 13% O ₂ (at min-at max)	mg/Nm³	19 - 14
Fuel Pellet	mm	Ø 6 L=3÷40
Hopper capacity	kg	12
Hourly consumption (at min-at max)	kg/h	0,6 - 1,7
Autonomy (at min-at max)	h	20 - 7
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	345
Operating electrical absorption (at max)	W	72
Chimney flue depression (at min-at max)	Pa	2 - 11
Mass of smoke (at min-at max)	g/sec	3,0 - 4,9
Exhaust fumes temperature (at min-at max)	°C	89 - 184
Distance from material comb. (back/side/under)	mm	40 / 250 / 0
Distance to material comb. (front/top)	mm	600 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	0
Ductable up to	m	0
Appliance Type (tightness)	Type	CC50

PLUS

 Upper, back and lateral exhaust	 Airtight pellet stove	 Cast iron burning pot
 Easy Start brazier	 Connection to the external thermostat	 Wi-Fi (optional)
 Remote control (optional)	 Daily weekly programming	

AVAILABLE FINISHES

7019031		Steel Red Bordeaux	EAN 8053859011040
7019032		Steel White	EAN 8053859011057
7019033		Steel Anthracite	EAN 8053859011064


CERTIFICATIONS

European standards
BlmSchV 2015
Regensburg
München
Stuttgart
Aachen



EN 14785:2006
CE

STOVE PACKAGE

	L (cm)	H (cm)	P (cm)
	80	117	60
	Volume (m³)	0,56	
	Gross weight (kg)	70	
	Net weight (kg)	60	

STORAGE

	N° (max)
MAX 2	2
1	

TRANSPORT


66 pz