


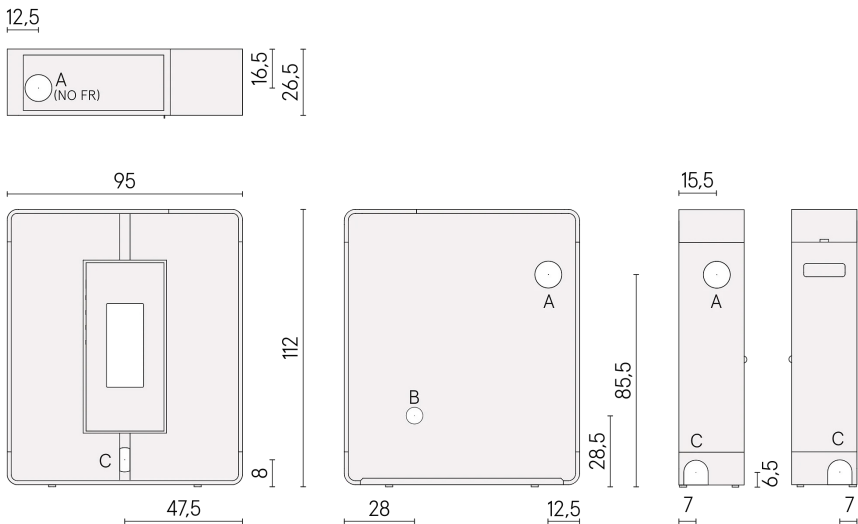

Pellet Air Plus

TECHNICAL DATA

Thermic Power (at min-at max)	kW	3,0 – 10,0
Introduced thermal power (at max)	kW	11,0
Water useful power (at min-at max)	kW	– –
Seasonal energy efficiency	ηs [%]	87
Useful efficiency (at min-at max)	%	94 – 91
Heatable volume (at min-at max)	m³	86 – 285
CO ₂ (min-max)	%	8,9– 14,0
Emissions CO (13% O ₂) (at min-at max)	mg/Nm³	174 – 119
Emissions OGC (13%O ₂) (at min-at max)	mg/Nm³	5– 4
Emissions NOX (13% O ₂) (at min-at max)	mg/Nm³	108 – 104
Dust content at 13% O ₂ (at min-at max)	mg/Nm³	10 – 17
Fuel Pellet	mm	Ø6 L=3÷40
Hopper capacity	kg	18
Hourly consumption (at min-at max)	kg/h	0,7 – 2,2
Autonomy (at min-at max)	h	27 – 8
Supply and frequency	V-Hz	230-50
Ignition electrical absorption	W	340
Operating electrical absorption (at max)	W	85.2
Chimney flue depression (at min-at max)	Pa	9 – 10
Mass of smoke (at min-at max)	g/sec	2,5 – 5,6
Exhaust fumes temperature (at min-at max)	°C	110 – 200
Distance from material comb. (back/side/under)	mm	0 / 300 / 0
Distance to material comb. (front/top)	mm	2000 / 750
Exhaust fumes outlet (A)	Ø mm	80
Combustion air inlet (B)	Ø mm	60
Ducting outlet (C)	Ø mm	80
Ductable up to	m	6

PLUS

	Upper, back and lateral exhaust		Cast iron door		Duction with 1 independent motor
	Sealed Chamber		Cast iron burning pot		Connection to the external thermostat
	Comfort mode - Maximum silence		Weekly programming		

AVAILABLE FINISHES

7022167		Steel Anthracite	EAN 8053859016793
7022168		Steel White	EAN 8053859016809
7022169		Steel Light Bronze	EAN 8053859016816
7022170		Steel Red Bordeaux	EAN 8053859016823
7022171		Steel Titanium	EAN 8053859016830

OPTIONAL

5022005	Upper exhaust kit	EAN 8053859017776
---------	-------------------	-------------------

CERTIFICATIONS

European standards
Art. 15A B-VG 2015
BlmSchV 2015
Regensburg
München
Stuttgart
Aachen

EN 16510-1:2022/
EN 16510-2-6:2022



STOVE PACKAGE

L (cm)	H (cm)	P (cm)
80	118	103

Volume (m³)	0,97
-------------	------

Gross weight (kg)	145.3
-------------------	-------

Net weight (kg)	130
-----------------	-----

STORAGE

	<table><tr><td>N° (max)</td></tr><tr><td>1</td></tr></table>	N° (max)	1
N° (max)			
1			

TRANSPORT

39 pz